

# ETAS M-ETK

## Modular ECU Access Device



### User Guide

## **Copyright**

The data in this document may not be altered or amended without special notification from ETAS GmbH. ETAS GmbH undertakes no further obligation in relation to this document. The software described in it can only be used if the customer is in possession of a general license agreement or single license. Using and copying is only allowed in concurrence with the specifications stipulated in the contract.

Under no circumstances may any part of this document be copied, reproduced, transmitted, stored in a retrieval system or translated into another language without the express written permission of ETAS GmbH.

**© Copyright 2026** ETAS GmbH, Stuttgart

The names and designations used in this document are trademarks or brands belonging to the respective owners.

M-ETK I User Guide R04 EN I 09.2026



## Contents

|          |                                             |           |
|----------|---------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                         | <b>8</b>  |
| 1.1      | About M-ETK                                 | 8         |
| 1.2      | Target audience and intended use            | 9         |
| 1.2.1    | Target Audience                             | 9         |
| 1.2.2    | Intended Use                                | 9         |
| 1.3      | Safety instructions and classification      | 9         |
| 1.3.1    | Classification of Safety Messages           | 10        |
| 1.3.2    | Assembly                                    | 11        |
| 1.3.3    | Operation                                   | 11        |
| 1.3.4    | Electrical connection                       | 12        |
| 1.3.5    | Cables and accessories                      | 13        |
| 1.4      | Unpacking                                   | 14        |
| <b>2</b> | <b>Product Overview</b>                     | <b>15</b> |
| 2.1      | Graphical overview of elements              | 15        |
| 2.1.1    | Licensing                                   | 16        |
| 2.1.2    | Configuration                               | 16        |
| 2.2      | Compatibility                               | 17        |
| <b>3</b> | <b>Hardware Setup</b>                       | <b>18</b> |
| 3.1      | Transportation and packaging                | 18        |
| 3.2      | Mounting and placement                      | 18        |
| 3.2.1    | Mounting the M-ETK into the ECU Housing     | 18        |
| 3.2.1.1  | Thermal Connection Requirements             | 18        |
| 3.2.1.2  | Mounting Material                           | 19        |
| 3.2.1.3  | Mounting Steps                              | 19        |
| 3.2.2    | Connection to the ECU                       | 23        |
| 3.3      | Connection to the power supply              | 24        |
| 3.3.1    | De-energizing the product                   | 24        |
| 3.3.2    | Permanent Power Supply inside ECU available | 24        |
| <b>4</b> | <b>Basic operation</b>                      | <b>26</b> |
| 4.1      | Status indicator                            | 27        |
| 4.1.1    | M-ETK State                                 | 27        |
| 4.1.1.1  | Power-On                                    | 27        |
| 4.1.1.2  | Standby (Sleep)                             | 27        |
| 4.1.1.3  | Wake Up                                     | 27        |
| 4.1.2    | LED Specification                           | 28        |

|          |                                                                |           |
|----------|----------------------------------------------------------------|-----------|
| <b>5</b> | <b>Overview of functions</b>                                   | <b>29</b> |
| 5.1      | Measurement                                                    | 29        |
| 5.1.1    | Core Concepts of Data Acquisition                              | 29        |
| 5.1.2    | Data Acquisition Methods                                       | 30        |
| 5.1.3    | The Role of Triggers and Interfaces                            | 31        |
| 5.2      | Calibration                                                    | 31        |
| 5.2.1    | Advanced Calibration: The Two-Page Concept with Overlay Memory | 32        |
| 5.3      | ECU Flashing                                                   | 33        |
| 5.3.1    | ECU Flashing with INCA                                         | 33        |
| 5.3.2    | ECU Flashing with 3rd Party XCP Tools                          | 34        |
| 5.4      | ECU Debugging                                                  | 35        |
| 5.5      | Rapid Prototyping                                              | 35        |
| 5.6      | Time Synchronization                                           | 36        |
| 5.7      | ECU start-up                                                   | 36        |
| 5.7.1    | ETK-Handshake                                                  | 36        |
| 5.7.2    | Advanced Code Check                                            | 36        |
| 5.7.3    | Start on any page                                              | 36        |
| 5.7.4    | Cold Start Measurement                                         | 37        |
| 5.7.5    | Calibration Wake-Up                                            | 37        |
| 5.8      | Support of 3rd party XCP Tools                                 | 37        |
| 5.9      | M-ETK Web Interface                                            | 37        |
| <b>6</b> | <b>Technical specifications</b>                                | <b>39</b> |
| 6.1      | Hardware specifications                                        | 39        |
| 6.1.1    | Ambient Conditions                                             | 39        |
| 6.1.2    | Mechanical Data                                                | 40        |
| 6.1.2.1  | Weight                                                         | 41        |
| 6.1.2.2  | Hole/Drilling Pattern for the ECU-housing M-ETK-AB1.0          | 41        |
| 6.1.2.3  | Hole/Drilling Pattern for the ECU-housing M-ETK-AB2.0          | 42        |
| 6.1.3    | M-ETK-T1.0 + M-ETK-AB1.0A                                      | 42        |
| 6.1.3.1  | Electrical Data                                                | 42        |
| 6.1.3.2  | Microcontroller Interface (adapter dependent)                  | 44        |
| 6.1.3.3  | Test Characteristics                                           | 45        |
| 6.1.3.4  | SWD Timing Characteristics                                     | 45        |
| 6.1.3.5  | Aurora Trace Timing Parameter                                  | 46        |
| 6.1.3.6  | Electrical Characteristics                                     | 46        |
| 6.1.4    | M-ETK-T1.0 + M-ETK-AB1.0B                                      | 50        |
| 6.1.4.1  | Electrical Data                                                | 50        |
| 6.1.4.2  | Microcontroller Interface (adapter dependent)                  | 53        |

|         |                                                               |    |
|---------|---------------------------------------------------------------|----|
| 6.1.4.3 | Test Characteristics .....                                    | 53 |
| 6.1.4.4 | SWD Timing Characteristics .....                              | 53 |
| 6.1.4.5 | Aurora Trace Timing Parameter .....                           | 54 |
| 6.1.4.6 | Electrical Characteristics .....                              | 55 |
| 6.1.5   | M-ETK-T1.0 + M-ETK-AB2.0A .....                               | 58 |
| 6.1.5.1 | Electrical Data .....                                         | 58 |
| 6.1.5.2 | Microcontroller Interface (adapter dependent) .....           | 60 |
| 6.1.5.3 | Test Characteristics .....                                    | 61 |
| 6.1.5.4 | SWD Timing Characteristics .....                              | 61 |
| 6.1.5.5 | Aurora Trace Timing Parameter .....                           | 61 |
| 6.1.5.6 | Electrical Characteristics .....                              | 62 |
| 6.1.6   | M-ETK-T1.0 + M-ETK-AB2.0B .....                               | 65 |
| 6.1.6.1 | Electrical Data .....                                         | 65 |
| 6.1.6.2 | Microcontroller Interface (adapter dependent) .....           | 67 |
| 6.1.6.3 | Test Characteristics .....                                    | 68 |
| 6.1.6.4 | SWD Timing Characteristics .....                              | 68 |
| 6.1.6.5 | Aurora Trace Timing Parameter .....                           | 68 |
| 6.1.6.6 | Electrical Characteristics .....                              | 69 |
| 6.2     | Interface specifications .....                                | 72 |
| 6.2.1   | Automotive Ethernet Interface .....                           | 72 |
| 6.3     | Product markings .....                                        | 73 |
| 7       | <b>Maintenance</b> .....                                      | 75 |
| 7.1     | Cleaning .....                                                | 75 |
| 7.2     | Repair service .....                                          | 75 |
| 8       | <b>Return form</b> .....                                      | 76 |
| 9       | <b>Accessories and order information</b> .....                | 77 |
| 9.1     | Ordering Information M-ETK .....                              | 77 |
| 9.2     | Ordering Information M-ETK AB .....                           | 78 |
| 9.2.1   | M-ETK-AB1.0 .....                                             | 78 |
| 9.2.1.1 | Order Information .....                                       | 78 |
| 9.2.1.2 | Compatible Cables Power Supply .....                          | 78 |
| 9.2.1.3 | Compatible Cables Ethernet connection .....                   | 79 |
| 9.2.2   | M-ETK-AB2.0 .....                                             | 79 |
| 9.2.2.1 | Order Information .....                                       | 79 |
| 9.2.2.2 | Compatible Cables Power supply .....                          | 80 |
| 9.2.2.3 | Compatible Cables Ethernet connection .....                   | 81 |
| 9.3     | Cables, Adapters and Accessories .....                        | 81 |
| 9.3.1   | Overview and Classification .....                             | 81 |
| 9.3.2   | Cables and Adapter Requirements for fail safe Operation ..... | 82 |

|          |                                             |    |
|----------|---------------------------------------------|----|
| 9.3.3    | CBAM300 Cable .....                         | 82 |
| 9.3.4    | CBAM305 Cable .....                         | 83 |
| 9.3.5    | CBAM320 Cable .....                         | 86 |
| 9.3.6    | CBAM340 Cable .....                         | 87 |
| 9.3.7    | CBAM350 Cable .....                         | 88 |
| 9.3.8    | CBAM435 (Automotive Ethernet) .....         | 89 |
| 9.3.8.1  | Usage .....                                 | 90 |
| 9.3.8.2  | Mechanical Dimensions .....                 | 90 |
| 9.3.8.3  | Connectors and Positions .....              | 90 |
| 9.3.8.4  | Temperature Range .....                     | 90 |
| 9.3.8.5  | Order Information .....                     | 91 |
| 9.3.9    | CBE250 (Cable for the HOST Interface) ..... | 91 |
| 9.3.10   | CBE260 Cable .....                          | 91 |
| 9.3.11   | CBEB130 (Automotive Ethernet) .....         | 92 |
| 9.3.11.1 | Usage .....                                 | 92 |
| 9.3.11.2 | Mechanical Dimensions .....                 | 92 |
| 9.3.11.3 | Connectors and Positions .....              | 93 |
| 9.3.11.4 | Temperature Range .....                     | 93 |
| 9.3.11.5 | Order Information .....                     | 93 |
| 9.3.12   | ETAM2 Adapter .....                         | 93 |
| 9.3.12.1 | Pin Assignment ETAM2 Connector .....        | 94 |
| 9.3.12.2 | Temperature Range .....                     | 94 |
| 9.3.12.3 | Ordering Information .....                  | 94 |
| 9.3.13   | ETAM5 ECU Adapter (Power) .....             | 94 |
| 9.3.13.1 | Usage .....                                 | 94 |
| 9.3.13.2 | Mechanical Dimensions .....                 | 95 |
| 9.3.13.3 | Connectors and Positions .....              | 95 |
| 9.3.13.4 | ECU Signals .....                           | 95 |
| 9.3.13.5 | Temperature Range .....                     | 96 |
| 9.3.13.6 | Ordering Information .....                  | 96 |
| 9.3.14   | ETAM9 ECU Adapter (Power) .....             | 96 |
| 9.3.14.1 | Usage .....                                 | 96 |
| 9.3.14.2 | ECU Signals .....                           | 96 |
| 9.3.14.3 | Temperature Range .....                     | 97 |
| 9.3.14.4 | Ordering Information .....                  | 97 |
| 9.3.15   | ETAM10 ECU Adapter (Power) .....            | 97 |
| 9.3.15.1 | Usage .....                                 | 97 |
| 9.3.15.2 | Mechanical Dimensions .....                 | 97 |
| 9.3.15.3 | ECU Signals .....                           | 98 |
| 9.3.15.4 | Temperature Range .....                     | 98 |
| 9.3.15.5 | Ordering Information .....                  | 98 |
| 9.3.16   | ETAM12 ECU Adapter (Power) .....            | 98 |

|           |                                    |            |
|-----------|------------------------------------|------------|
| 9.3.16.1  | Usage .....                        | 98         |
| 9.3.16.2  | Mechanical Dimensions .....        | 99         |
| 9.3.16.3  | ECU Signals .....                  | 99         |
| 9.3.16.4  | Temperature Range .....            | 99         |
| 9.3.16.5  | Ordering Information .....         | 99         |
| 9.3.17    | ETV5 Cable .....                   | 100        |
| 9.3.17.1  | Usage .....                        | 100        |
| 9.3.17.2  | Pin Assignment .....               | 100        |
| 9.3.17.3  | Temperature Range .....            | 100        |
| 9.3.17.4  | Ordering .....                     | 100        |
| <b>10</b> | <b>Contact Information .....</b>   | <b>101</b> |
| <b>11</b> | <b>Legal information .....</b>     | <b>102</b> |
| 11.1      | Use of Open Source Software .....  | 102        |
| 11.2      | Certification and conformity ..... | 102        |
| 11.2.1    | Declarable Substances .....        | 102        |

# 1 Introduction

The M-ETK offers a highly versatile and adaptable solution specifically designed for ECU (Electronic Control Unit) developers and calibration engineers in the automotive industry. It facilitates efficient and effective measurement, calibration, and reprogramming of ECU software, standing out due to its modular architecture, compact size, and high performance. The M-ETK will support a wide range of microcontroller variants and interfaces, ensuring seamless integration with existing systems and future use cases.


## 1.1 About M-ETK

The M-ETK provides the access to internal memory of a  $\mu\text{C}$  and allows for measurement of variables during runtime of the system as well as parameter modification.

In general, there are three main drivers for choosing an M-ETK as an ECU access device for measurement and calibration tasks, instead of a pure SW solution like XCP on CAN/ETH.

- Minimized impact on the  $\mu\text{C}$ /SoC runtime and memory consumption.
- Support of very short raster times down to 10  $\mu\text{s}$  (cf. XCPonCAN with 1 ms).
- Support of high number of variables, e.g. > 100.000 (cf. XCPonCAN with some 100 variables).

For more technical data on the M-ETK see "[Technical specifications](#)" on [page 39](#)

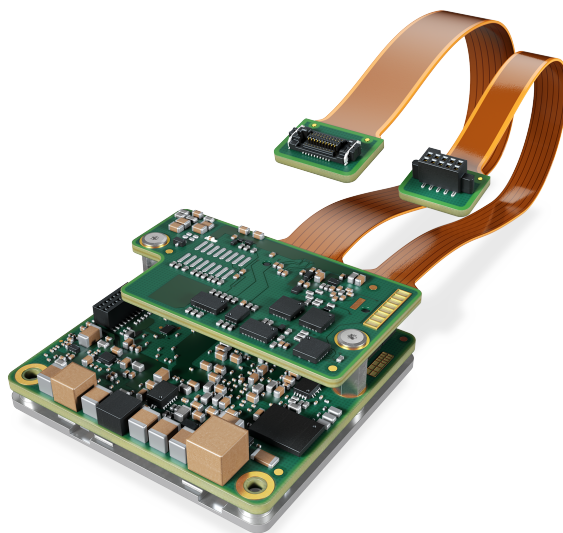

## 1.2 Target audience and intended use

### 1.2.1 Target Audience

For the safe and efficient use of the product, the user is expected to have comprehensive expertise and practical experience in the following automotive domains:

- Electrical and electronic system architectures in motor vehicles
- Sensor technology and control engineering
- Bus systems and communication protocols
- Electronic control unit (ECU) development and calibration
- Safety guidelines and regulatory requirements for the development and validation of vehicle systems

### 1.2.2 Intended Use

The product was developed and approved for applications in the automotive sector. Only operate the product as per its specifications. If the product is used in any other way, product safety is no longer ensured.

An emulator probe (ETK) is an electronic assembly that is installed in a vehicle control unit (ECU) to exchange data with a measurement and calibration tool (e.g. INCA).

#### *Technical Condition*

The product is designed in accordance with state-of-the-art technology. Only operate the product and its accessories if they are in perfect working order. Shut down a damaged product immediately. The product cannot be repaired. Dispose of the product properly. Do not open or alter the product. Only ETAS may make changes to the product.

#### *Application Areas*

- The product is approved for use in the following areas:
  - ECUs
- Do not operate the product in a wet or damp environment.
- Do not operate the product in potentially explosive atmospheres.
- Do not operate the product in high voltage areas.

## 1.3 Safety instructions and classification

Refer to the following safety instructions and the technical documentation available to download from the ETAS website [www.etas.com](http://www.etas.com). Keep the information provided in a safe place.

Failure to comply with the safety instructions may lead to the risk of damage to life and limb or property. The ETAS Group and its representatives shall not be liable for any damage or injury caused by improper operation or use of the product.

Only use the product if you have read and understood the information concerning safe operation and have the required qualifications and training for this product. If you have questions about safe operation, contact ETAS:

- Technical Support: [www.etas.com/hotlines](http://www.etas.com/hotlines)
- ETAS contact partners by region: [www.etas.com/contact](http://www.etas.com/contact)

The product is only approved for the applications described in the technical documentation. When using and operating this product, all applicable regulations and laws must be observed.

ETAS products made available as beta versions or prototypes of firmware, hardware and/or software are to be used exclusively for testing and evaluation purposes. These products may not have sufficient technical documentation and not fulfill all requirements regarding quality and accuracy for market-released series products. The product performance may therefore differ from the product description. Only use the product under controlled testing and evaluation conditions. Do not use data and results from beta versions without prior and separate verification and validation and do not share them with third parties.

Before starting up the product, check whether there is a Known Issue Report (KIR) for that product version: [www.etas.com/kir](http://www.etas.com/kir) (password: KETASIR). Note the information given in the report.

Program codes or program control sequences that are created or changed via ETAS products, as well as all types of data obtained through the use of ETAS products, must be checked for their reliability and suitability prior to use or distribution. Only use these codes or sequences in public areas (e.g., in road traffic) if you have ensured that the application and product settings are safe through testing in self-contained and designated testing environments and circuits.

This ETAS product allows you to influence safety-relevant systems or data (e.g. in motor vehicles, vehicle components and test benches). In the event of a malfunction or a hazardous situation, it must be possible to put the system into a safe state (e.g., emergency stop or emergency operation).

### 1.3.1 Classification of Safety Messages

Safety messages warn of dangers that can lead to personal injury or damage to property:





### **DANGER**

**DANGER** indicates a hazardous situation that, if not avoided, will result in death or serious injury.



### **WARNING**

**WARNING** indicates a hazardous situation that, if not avoided, could result in death or serious injury.



### **CAUTION**

**CAUTION** indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

### ***NOTICE***

**NOTICE** indicates a situation that, if not avoided, could result in damage to physical property.

### ***ATTENTION***

**ATTENTION** indicates a situation that, if not avoided, could result in damage to digital property like data loss, data corruption and system vulnerability.

## 1.3.2 Assembly

The product must only be removed from the ESD packaging and installed in a workplace that is protected against static discharges.

Only install, connect, disconnect, and cable ETAS products and components when they are de-energized.

When installing the product, make sure that the fastening elements do not damage the product's printed circuit board or cause a short circuit.

## 1.3.3 Operation

Only operate the product approved firmware. You can find information about updating the firmware in the user guide.

If the firmware update is not completed successfully, try it again. If a new firmware update is not possible and the product is not functional, send the product to ETAS.

### 1.3.4 Electrical connection

#### **NOTICE**

##### **Damage to the electronics due to potential equalization**

The cables' shield may be connected to the housing, the ground or the ground for the product's power supply. If there are different ground potentials in the test setup, equalizing currents can flow between the products via the cables' shield.

Take account of different electric potentials in your test setup and take appropriate measures to prevent equalizing currents.

#### **Electrical Safety and Power Supply**

- Only connect the product to electric circuits with safety extra-low voltage in accordance with IEC 61140 (devices of class III) within the voltage limits for accessible parts as per IEC 61010-1.
- Comply with the connection and setting values (see "[Technical specifications](#)" on page 39).
- The power supply for the product must be safely disconnected from the mains power. For example, use a vehicle battery or a suitable lab power supply.
- Only use lab power supplies with dual protection for the supply network (with double/reinforced insulation (DI/RI)).
- The power supply must be suitable for use according to the ambient conditions for the product.
- It is possible to discharge the vehicle battery in regular operation and long standby operation.
- Central load-dump protection is required for operation.

## Connection to the power supply



### **DANGER**

#### **Undefined vehicle behavior due to an ECU reset**

If the external power supply to the ETK is interrupted (e.g. cut, disconnected, etc.), this may lead to the ECU being reset.

- Connect the internal power supply of the ECU to the ETK in addition to the external power supply.
- If this is not possible, ensure that the external power supply to the ETK is not interrupted during operation.



### **WARNING**

#### **Risk to life from electric shock**

If an unsuitable power supply is used, this may generate a hazardous electrical voltage.

Use a power supply that is permitted for the product.

Ensure that the connections of the power supply are easily accessible.

## De-energizing the product

Disconnect the product from the power supply in one of the following ways:

- Switch off the laboratory power supply for the test setup.
- Disconnect the test setup's connection to the vehicle battery.
- Remove the power cord.
- Remove all cables from the product.

## 1.3.5 Cables and accessories

### Cables

- Only use ETAS cables, cables recommended by ETAS or other cables certified for the application.
- Route the cables such that they are protected against abrasion, damage, deformation and kinking.
- Do not place any objects on the cables.
- Do not use any damaged cables.
- The connector and connection must not be dirty.

- The connector and connection must be compatible.
- Correctly align the connector with the connection.
- Do not connect the connector and connection by force.

For detailed information about Cables, see "[Cables, Adapters and Accessories](#)" on page 81.

## Accessories

Use ETAS accessories, accessories recommended by ETAS or other accessories certified for the application. For detailed information about accessories, see "[Cables, Adapters and Accessories](#)" on page 81.

## 1.4 Unpacking


1. Prepare workspace  
Unpack in a clean, dry, well-lit area with enough space for the equipment and avoid static damage or physical harm.
2. Open package  
Use appropriate tools to carefully open the box without damaging the contents.
3. Verify contents  
Compare the items with the packing list "Contents of Package" to ensure all components are present.
4. Inspect for damage  
Visually check each item for physical damage. If found, document and report it on [www.etas.com/hotlines](http://www.etas.com/hotlines).


## 2 Product Overview

### 2.1 Graphical overview of elements

*The M-ETK system includes:*

- **M-ETK Device:** The core hardware unit to be used with the M-ETK Adapterboard and the required SW Service Pack.
- **µC Specific Base License:** Essential software component dedicated to specific microcontroller families.
- **M-ETK Adapterboard:** Provides the specific hardware interfaces of the ECU, the XCP interface connection and the power supply of the emulation device.
- **Feature Licenses (Example):** M-ETK Feature License Trace2PIN: Support of AURORA Trace interface

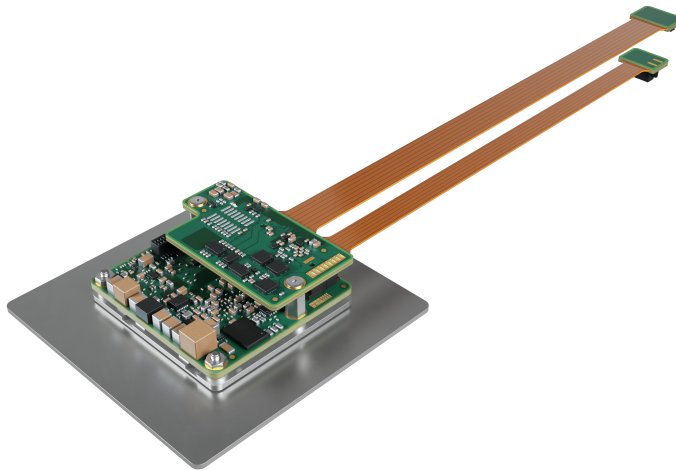

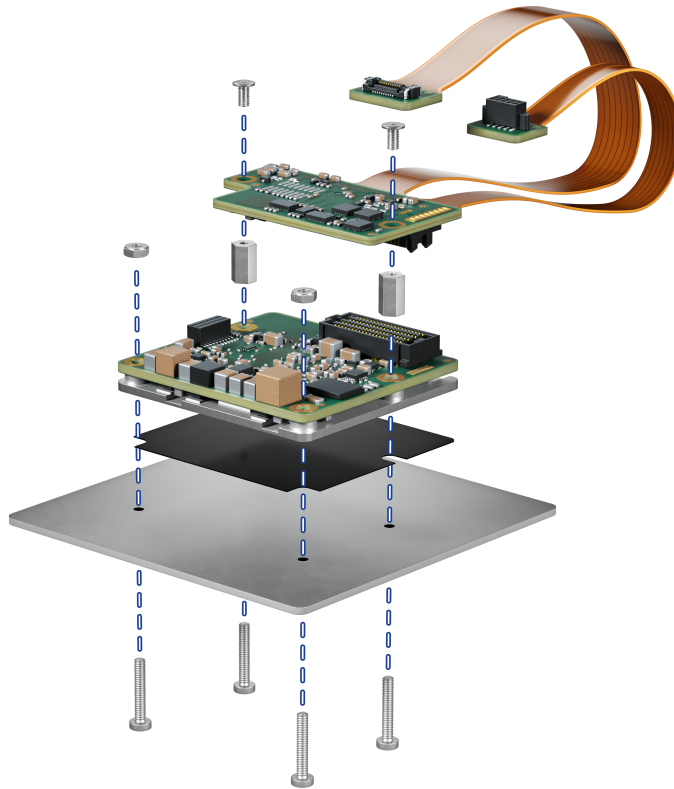

For more technical data on the M-ETK see the chapter ["Technical specifications" on page 39](#).

### 2.1.1 Licensing

The M-ETK provides a feature licensing approach.

- **Feature Upgrades:** Additional features can be added at any time during the maintenance period of the device.
- **License Management:** A web portal allows customers to manage their licenses and bind them to a specific HW device.

### 2.1.2 Configuration

The configuration of the M-ETK can be done directly with INCA or by using the XCT tool provided by ETAS.

#### INCA Configuration

- This configuration is designed to work seamlessly with ETAS INCA (Integrated Calibration and Application Tool) and is designed for optimized functionality.

#### XCT Configuration

- XCT (X-ETK Configuration Tool) configures the ETK to use the standardized XCP (Universal Measurement and Calibration Protocol) on Ethernet.

- This configuration allows the M-ETK to communicate with third-party tools, that supports the XCP standard.

## 2.2 Compatibility

| Device                               | Data Rate | Time Sync | Cable   | Adapter               | M-ETK-AB    | M-ETK Type |
|--------------------------------------|-----------|-----------|---------|-----------------------|-------------|------------|
| ES160.1<br>(1Gb/s Media Converter)   | 1Gb/s     | PTP       | CBEB130 | CBAM435<br>(no power) | M-ETK-AB1.0 | M-ETK-T    |
| ES162.1<br>(1Gb/s Media Converter)   | 1Gb/s     | PTP       | CBEB130 | CBAM435<br>(no power) |             |            |
| ES165.1<br>(100Mb/s Media Converter) | 100Mb/s   | PTP       | CBEB130 | CBAM435<br>(no power) |             |            |

## 3 Hardware Setup

### 3.1 Transportation and packaging

- Only transport and store the product in ESD packaging.
- Only transport the product individually.
- Do not transport the product by the connected cables.

### 3.2 Mounting and placement

#### 3.2.1 Mounting the M-ETK into the ECU Housing

##### **NOTICE**

##### **Damage to the electronics due to potential equalization**

The cables' shield may be connected to the housing, the ground or the ground for the product's power supply. If there are different ground potentials in the test setup, equalizing currents can flow between the products via the cables' shield. Take account of different electric potentials in your test setup and take appropriate measures to prevent equalizing currents.

#### 3.2.1.1 Thermal Connection Requirements

To ensure proper operation of the M-ETK over the specified temperature range, the M-ETK must be mounted to the ECU metal housing. This enables thermal dissipation of the electronic components used on the M-ETK to the ECU housing.



##### **Note**

To avoid overheating of the M-ETK the connection to the ECU housing following requirements for thermal resistance must be met:

- ECU housing thermal resistance at the M-ETK mounting position shall be less than 0.64 W/K. This has to be guaranteed by the size and material of the ECU housing, as well as the heat conductive material.

If the value of ECU housing thermal conductivity cannot be achieved, additional cooling structures, e.g. heat sinks, should be applied.

For additional details on thermal dissipation, see chapter "[Technical specifications](#)" on page 39.



### 3.2.1.2 Mounting Material

#### ***M-ETK-T + M-ETK-AB1.0***

To mount the M-ETK-T + M-ETK-AB1.0 to the ECU housing several materials are required:

- M-ETK-T
- M-ETK-AB1.0
  - incl. M2 x 7 Spacers
  - incl. M2 x 4 cylinder head screws
- ECU metal housing
- Heat conductive paste (or foil)
- Four screws M2
  - cylinder head, countersunk-, self-sealing screw
  - length depending on the ECU project:
    - min. 7.95mm + wall thickness ECU housing
    - max. 9.6mm + wall thickness ECU housing
- Two nuts M2
- Thread locking fluid
- Screwdriver T4, T6

#### ***M-ETK-T + M-ETK-AB2.0***

To mount the M-ETK-T + M-ETK-AB2.0 to the ECU housing several materials are required:

- M-ETK-T
- M-ETK-AB2.0
  - incl. M2 x 7 Spacers
  - incl. M2 x 4 cylinder head screws
- ECU metal housing
- Heat conductive paste (or foil) with a thermal conductivity  $> 0.75 \text{ W/(m} \cdot \text{K)}$
- Three screws M2
  - cylinder head, countersunk-, self-sealing screw
  - length depending on the ECU project:
    - min. 7.95mm + wall thickness ECU housing
    - max. 9.6mm + wall thickness ECU housing
- Thread locking fluid
- Screwdriver T4, T6

### 3.2.1.3 Mounting Steps

To mount the M-ETK into the ECU housing several mounting steps are required:


### *Preparing the ECU Housing*

1. Drill four<sup>1)</sup> or three<sup>2)</sup> holes in the ECU housing.

For further information on the dimensions of the drill holes, see ["Technical specifications" on page 39](#).

2. Add the opening for the Cable gland for the CBAMxxx cable.

### *Preparing the M-ETK*

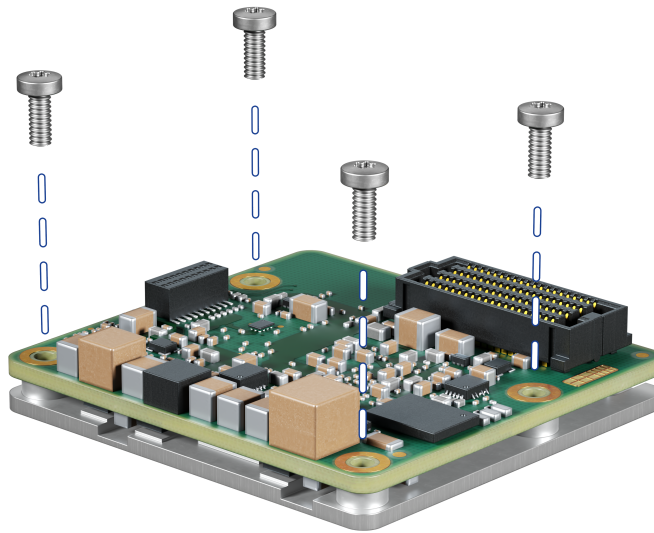


1. Remove the four screws from the M-ETK. The screws are only a transport lock for the heatspreader.
2. Apply a thin layer of heat conductive paste (or foil) to the bottom side of the M-ETK heatspreader.

---


1) M-ETK-AB1.0

2) M-ETK-AB2.0


### *Attaching the M-ETK to the ECU Housing*

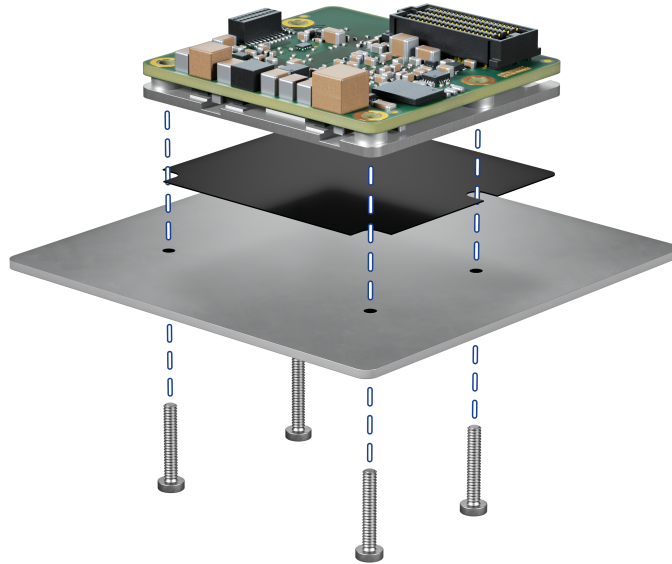

1. Only for M-ETK-AB1.0: Place the M-ETK with the thermal paste (or foil) into the ECU housing and fasten it from the outside using four M2 screws, length depending on the metal housing.

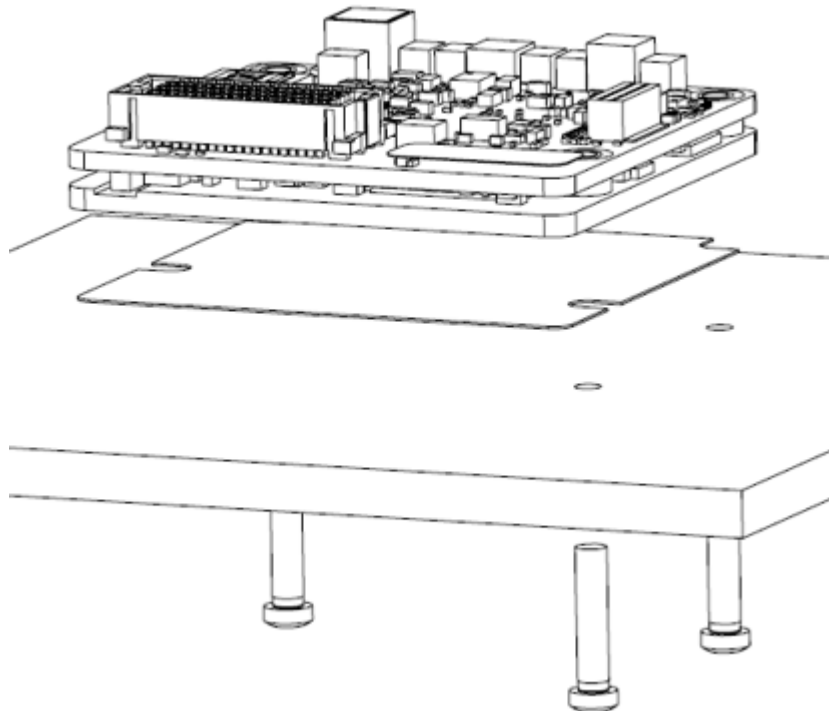


2. Only for M-ETK-AB2.0: Place the M-ETK with the thermal paste (or foil) into the ECU housing and fasten it from the outside using three M2 screws, length depending on the metal housing.

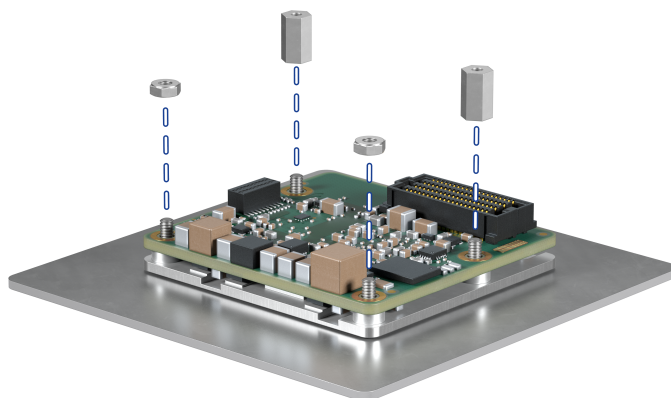


3. Insert the screws into the holes in the ECU housing.
4. Add the M2 nuts (only M-ETK-AB1.0) and spacers. Use thread locking fluid.

### ***Connect the adapter***

1. Connect the M-ETK-AB1.0 / M-ETK-AB2.0 into the M-ETK.

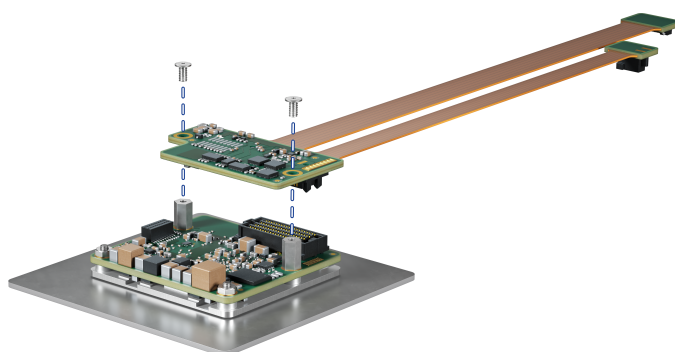


2. Only for M-ETK-AB1.0: Screw it in place with the two M2 x 4 screws. Use thread locking fluid.

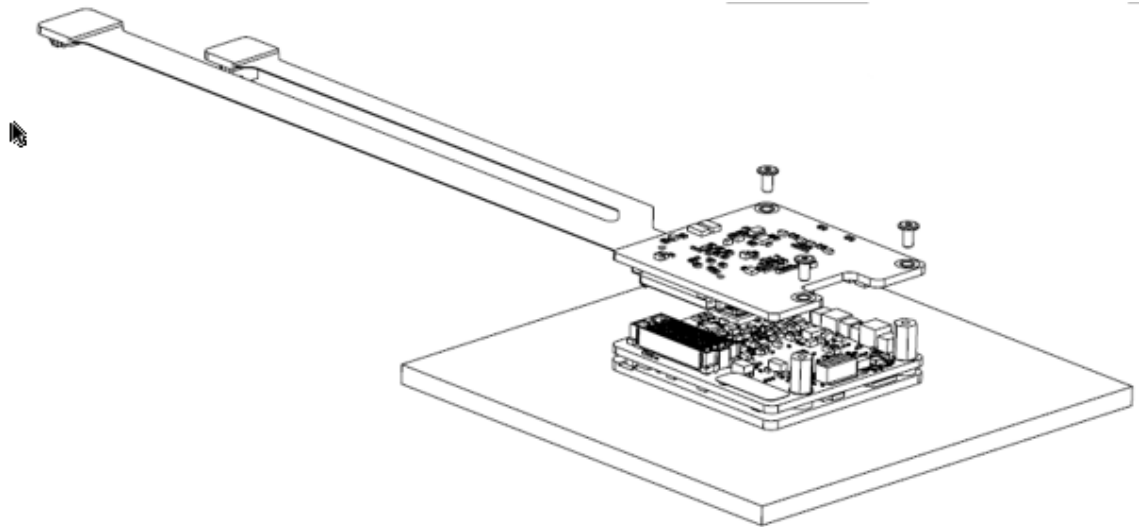

3. Only for M-ETK-AB2.0: Screw it in place with the three M2 x 4 screws. Use thread locking fluid.

### 3.2.2 Connection to the ECU

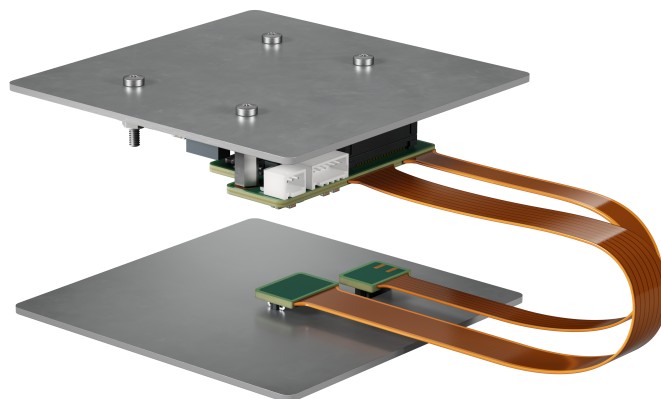

1. Plug the two connectors onto the ECU circuit board.
2. Connect the powercable and CBAMxxx cable.
3. Close the ECU housing.

### 3.3 Connection to the power supply



#### **DANGER**

##### **Undefined vehicle behavior due to an ECU reset**

If the external power supply to the ETK is interrupted (e.g. cut, disconnected, etc.), this may lead to the ECU being reset.

- Connect the internal power supply of the ECU to the ETK in addition to the external power supply.
- If this is not possible, ensure that the external power supply to the ETK is not interrupted during operation.



#### **WARNING**

##### **Risk to life from electric shock**

If an unsuitable power supply is used, this may generate a hazardous electrical voltage.

- Use a power supply that is permitted for the product.

#### **NOTICE**

##### **Damage to the electronics due to potential equalization**


The cables' shield may be connected to the housing, the ground or the ground for the product's power supply. If there are different ground potentials in the test setup, equalizing currents can flow between the products via the cables' shield.

Take account of different electric potentials in your test setup and take appropriate measures to prevent equalizing currents.

#### 3.3.1 De-energizing the product

- Disconnect the product from the power supply.
- Switch off the laboratory power supply for the test setup.
- Disconnect the test setup's connection to the vehicle battery.
- Remove the power cord.

#### 3.3.2 Permanent Power Supply inside ECU available

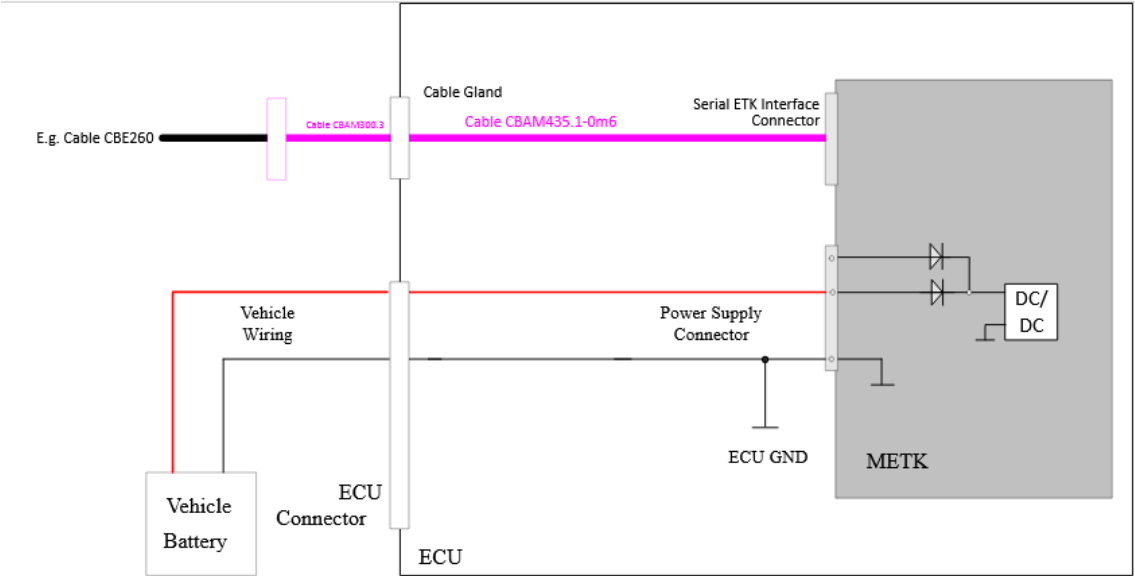

## 4 Basic operation

### ***Adapterboard Connection***

- Align the M-ETK Adapterboard variant with the designated connector on the M-ETK-T Device.
- Gently push until it is securely seated.

### ***Physical Integration into ECU***

The M-ETK is designed for on premise integration. This typically involves connecting the M-ETK Device and its Adapterboard to the development ECU's hardware interfaces. Please note that the M-ETK must be mounted in the low-voltage area of the ECU.

### ***Power Connection***

Connect the M-ETK to the ECU's low voltage power supply or a suitable external power source according to its specified voltage requirements.

### ***Software Integration***

The required M-ETK software components (e.g., Distab, 2-page calibration handling, handshake mechanisms) need to be integrated into the ECU's software. This is typically performed by a HW/SW Integrator.

### ***Network Connection***

Connect the M-ETK's Automotive Ethernet XCP interface to your development network.

### ***Feature License Activation***


Activate any purchased feature licenses (e.g., Trace2Pin) through the provided software tools.





### 4.1.2 LED Specification

There are three LEDs displaying the operating mode M-ETK:

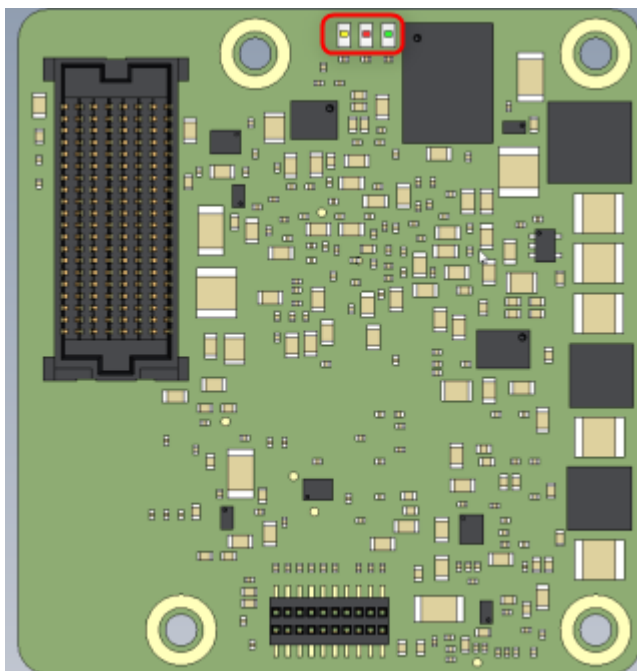

| LED    | State    | Definition                                                                   |
|--------|----------|------------------------------------------------------------------------------|
| Red    | On       | M-ETK is supplied with power and active.                                     |
|        | Flashing | Incompatible Adapter detected. Please refer to the HSP Tool or M-ETK Web-UI. |
| Green  | Off      | The Working Page is valid.                                                   |
|        | Flashing | Incompatible Adapter detected. Please refer to the HSP Tool or M-ETK Web-UI. |
|        | On       | The Working Page is invalid.                                                 |
| Yellow | Off      | ETK: Link Down.                                                              |
|        | On       | ETK: Link Up.                                                                |
|        | Flashing | Incompatible Adapter detected. Please refer to the HSP Tool or M-ETK Web-UI. |

## 5 Overview of functions


### 5.1 Measurement

The M-ETK provides comprehensive capabilities for real-time measurement of internal ECU variables (signals, parameters, memory contents). This is crucial for understanding the ECU's behavior, validating software functions, and supporting calibration activities. The system supports various measurement techniques to cater to different microcontroller ( $\mu$ C interface) architectures, debug interfaces, and performance requirements.

#### 5.1.1 Core Concepts of Data Acquisition

All measurement involves two fundamental steps:

- **Data Sampling ( $\mu$ C interface)**: The point in time when a signal's value is captured from the ECU's memory.
- **Data Transmission (XCP interface)**: The process of sending the captured data from the ECU/M-ETK to your computer.

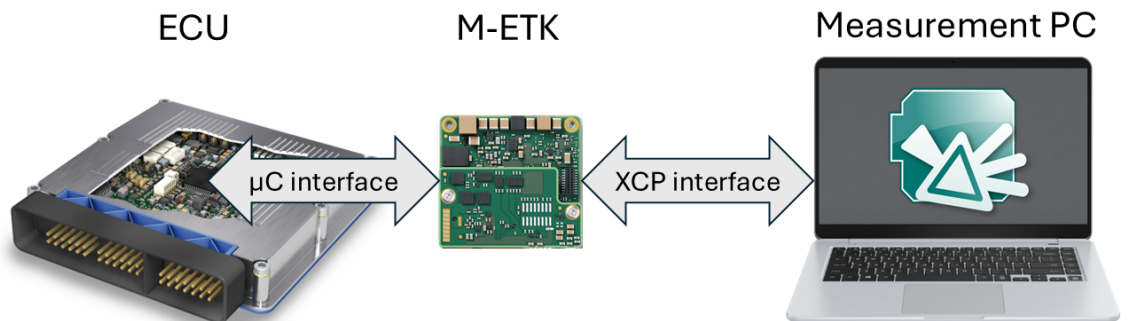

There are two primary modes for sampling this data:

- **Polling Mode**: The measurement tool continuously requests data from the ECU. This is simple to implement but is less efficient, as each data point requires a separate request. It can create a high load on the serial interface and the data may not be consistent, because it is not measured synchronous to its creation time within the ECU.

- **Event-Triggered / DAQ Mode:** The ECU is configured to autonomously sample and transmit data when a specific event occurs (a "trigger"). This is highly efficient as it allows for blocks of data (known as DAQ lists) to be sent in bursts, significantly reducing bus load and improving performance. This is the preferred mode for most measurement tasks.

### 5.1.2 Data Acquisition Methods

The M-ETK supports several data acquisition methods, each with different characteristics, benefits, and resource requirements.

| Method                             | Description                                                                                                                                                    | Key Advantages                                                                                                   | Key Considerations                                                                                                                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timer-Triggered Polling            | The M-ETK periodically reads signal values directly from the ECU's RAM at a user-defined interval.                                                             | Very easy to set up.<br>- Requires no changes to the ECU software.                                               | No signal consistency; as values can change while being read.<br>- Inefficient for high signal counts.                                                                                                    |
| Triggered Direct Measurement (TDM) | The ECU's software sends a trigger to the M-ETK, which then reads the required signals directly from their memory addresses.                                   | Low impact on ECU runtime.<br>- Simple triggered mechanism.                                                      | Signal consistency is not guaranteed if timing is not managed carefully.<br>- Performance is limited by the $\mu$ C interface speed.                                                                      |
| Display Table (DISTAB)             | When triggered, the ECU copies a pre-defined list of signals into a dedicated, consistent data block. The M-ETK reads this entire block in a single operation. | Guaranteed data consistency for all signals within the block.<br>- Efficient use of the communication interface. | Requires a small amount of ECU CPU time and RAM to copy the data.<br>- M-ETK supports Dynamic DISTAB (DISTAB17), a flexible version that allows measurement lists to be changed on-the-fly from the tool. |

| Method                            | Description                                                                                                                                                               | Key Advantages                                                                                                | Key Considerations                                                                                                                                                                                   |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Trace-Based Measurement (T2R/T2P) | A hardware trace unit on the microcontroller automatically captures every data change in a monitored memory window. This provides the most detailed measurement possible. | Perfect data consistency.<br>- No ECU runtime overhead for measurement.<br>- Capable of very high data rates. | T2P offers the highest performance by streaming data directly over a fast dedicated interface, while T2R writes the data to a $\mu$ C internal buffer memory and provides it via the debug interface |

### 5.1.3 The Role of Triggers and Interfaces

- **Triggers:** A trigger is an event that initiates a data measurement. Triggers are highly configurable and can be based on timers (e.g., every 10ms), software events within the ECU code, or specific hardware signals. This ensures that data is captured at the precise moment it is needed. To ensure data validity even when the ECU is off, the uC supports a standby supply for the RAM used for the Working Page from the M-ETK.
- **Interfaces:** The measurement performance heavily depends on the physical connection between the M-ETK and the ECU. The M-ETK supports a wide range of microcontroller interfaces, from standard serial interfaces (like JTAG or DAP) for basic measurement to high-speed trace interfaces (like Aurora) for the most demanding data acquisition tasks. This versatility allows the M-ETK to be a cost-effective and high-performance solution for a variety of use cases.

## 5.2 Calibration

Calibration is the process of adjusting and optimizing the parameters in an Electronic Control Unit (ECU) to fine-tune its behavior.

The M-ETK is a high-performance hardware interface that acts as a bridge between your computer, running a calibration software like ETAS INCA, and the vehicle's ECU. It provides a fast and reliable communication link, enabling you to not only read measurement data from the ECU but also to write new values to it.

The M-ETK uses standardized XCP (Universal Measurement and Calibration Protocol) for all functionalities.

The effect of the changes can be observed in real-time by monitoring the measurement data in parallel.

### 5.2.1 Advanced Calibration: The Two-Page Concept with Overlay

#### Memory

To allow for safe and flexible calibration, the M-ETK supports the "Two-Page" memory concept, which relies on a feature in the microcontroller ( $\mu$ C) called "Overlay Memory."

Imagine you have two identical sets of calibration data:

- **Reference Page (RP)**: This is the original, safe set of parameters. It is stored in the ECU's non-volatile Flash memory. Think of this as your "factory settings" or the last known good configuration.
- **Working Page (WP)**: This is a copy of the parameters stored in a fast, volatile RAM area. This is the page you actively modify during a calibration session.

This provides two major benefits:

- **Safety**: You can experiment freely in the Working Page. If a change leads to undesirable behavior, you can simply switch back to the stable Reference Page.
- **Persistence**: The changes made in the Working Page are temporary because they are in RAM. Once you are satisfied with your new calibration, you can permanently save the data from the Working Page back into the Flash memory if the ECU flashing feature is available for the M-ETK.

The Overlay Memory functionality is a hardware feature of the  $\mu$ C that allows the ECU to seamlessly switch between these two pages. When you start a calibration session with a tool like INCA, the system activates the overlay memory. Any time the ECU's software tries to read a calibration parameter from the non-volatile Flash memory (the Reference Page), the overlay memory feature intervenes. It redirects the request automatically to the corresponding address in the RAM (the Working Page). This allows you to make changes in the Working Page and see their effect instantly without altering the original, safe data in the Flash.

#### *Overlay Memory Descriptor (OMD)*

To setup the Overlay Memory feature in the  $\mu$ C an OMD is used. The OMD contains the memory regions used as Working Page, Reference Page, and the respective sizes. This allows you to make changes in the Working Page and see their effect instantly without altering the original, safe data in the Flash.

### *One Page Concept*

If no overlay controller is available a single page concept can be used for calibration or an ECU SW supported pointer-based calibration method.

## 5.3 ECU Flashing

ECU flashing is the process of programming selected internal or external non-volatile memory (NVM) of an Electronic Control Unit (ECU).

### 5.3.1 ECU Flashing with INCA

The M-ETK is prepared for this process and provides an infrastructure for ECU flashing to implement and realize a fast and reliable solution for flashing ECU software directly in the vehicle, using the ETAS INCA software environment.

Compared to ECU flashing via XCP on CAN or FlexRay, using the M-ETK offers significantly shorter programming times and provides powerful recovery options. The entire process is typically automated and managed by a ProF script within INCA.

There are two primary methods for flashing an ECU with the M-ETK.

**Bootstrap Flashing (BSF):** This is the recommended M-ETK ECU flashing solution if possible to realize. For this solution the control of the microcontroller unit will be taken over by using the debug interface. All active tuning protections and watchdog timers, which could interrupt this process must be disabled beforehand. After halting all active and running cores, an ETAS proprietary flashing application will be downloaded. It will be executed out of the internal RAM. This application manages the programming of the non-volatile memory.



#### Note

Bootstrap flashing does not support the flashing of security protected areas in the  $\mu$ C.

**ECU-backed Flashing (EBF):** The ECU-backed flashing is an alternative solution, if the Bootstrap Flashing solution cannot be realized. The reason for this might be limitations caused by tuning protection, watchdog timer or debug interface limitations of the microcontroller unit. To realize this flashing solution ETAS proprietary interfaces must be implemented in the ECU software.

In general we differentiate between 2 possible variants:

- ECU software does the non-volatile memory programming. Therefore, the ECU software must support the full ETAS proprietary communication interface. In this case the ECU software can continue serving tuning protections and watchdog timers.

- An ETAS proprietary flashing application performs the non-volatile memory programming after being executed by the ECU software. The ECU software cannot serve tuning protection and watchdog timers during the process on the other side only a minimal ETAS proprietary communication. On the interface must be implemented.

| Feature                   | Use Case                                                                                                                                              | ECU's Role                                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bootstrap Flashing (BSF)  | Programming of selected internal or external non-volatile memory. Tuning protection and watchdog timers must be disabled for this process beforehand. | <b>Passive:</b> The control of the microcontroller is taken over via the debug interface by the M-ETK.                                                                     |
| ECU-backed Flashing (EBF) | Depending on the ECU software execution, selected internal or external non-volatile memory can be programmed.                                         | <b>Active:</b> The ECU software performs the non-volatile memory flashprogramming and is able to handle active tuning protections and watchdog timers during this process. |

#### Note

As the ECU flashing procedure and options depend strongly on the Microcontroller system context (e.g. tuning protection, watchdog behavior, NVM type) [ETAS support](#) should be contacted in an early project phase for the appropriate solution.

### 5.3.2 ECU Flashing with 3rd Party XCP Tools

It is also possible to use 3rd-party tools (from vendors other than ETAS) to flash an ECU through the M-ETK. The M-ETK can act as a universal bridge, allowing other software to communicate with the ECU.

#### Note

When using a 3rd-party tool, you are restricted to only the functions available through mandatory XCP commands. (PGM commands). Contact the [ETAS support](#).



## 5.4 ECU Debugging

ECU software debugging is the process of finding and resolving errors, or "bugs," within the ECU (Electronic Control Unit) software. This is a critical task for ECU developers, allowing them to interactively step through code, inspect memory, and analyze the software's behavior in real-time.

A common challenge during development is that the measurement and calibration tool (like ETAS INCA) and a software debugger (from vendors like Lauterbach or PLS) both require access to the same physical debug interface on the microcontroller ( $\mu$ C). The M-ETK provides a solution to this by enabling parallel access.

This is accomplished through a method called arbitration, where the M-ETK manages access to the shared  $\mu$ C debug port.

### *Software Debug Arbitration*

This is a software-based solution for enabling parallel debugging. In this mode, the third-party debugger communicates with the ECU indirectly via an XCP backend provided by the debugger tool supplier. The M-ETK, in conjunction with INCA, arbitrates the access to the debug interface. This allows you to run your debugger and measurement tools at the same time through a single M-ETK connection.

Key Features:

- ETAS standard solution supported by the M-ETK.
- Enables simultaneous use of INCA and a debugger.
- Requires an XCP backend from the debugger tool supplier.
- Software Debugging over XCP, Version 1.1.0.

## 5.5 Rapid Prototyping

Rapid Prototyping (RP) is a powerful technique that allows developers to test new or modified software functions on a real Electronic Control Unit (ECU) without the need to reprogramming (flash) the ECU's memory for every change. The M-ETK facilitates this process by using an "external bypass" method in conjunction with dedicated ETAS prototyping hardware (i.e. ES910/ES830) and software (i.e., INTECRIO). The M-ETK's external bypass solution provides a robust framework for rapid prototyping by ensuring that critical tasks are prioritized, and that the overall latency of the bypass loop is low and predictable, making it suitable for even the most time-sensitive automotive applications.

## 5.6 Time Synchronization

In modern vehicle systems, data are collected from multiple Electronic Control Units and additional measurement devices at the same time. To accurately analyze this data, it's crucial to know the precise time at which every single event occurred. Time Synchronization is the process that ensures all components in your measurement system, including multiple M-ETK modules and the INCA software, share a single, unified timeline.

M-ETK supports the standardized PTP (a profile of IEEE 1588) to create a robust, high-precision time synchronization network where a master device provides a common clock for synchronized modules.

## 5.7 ECU start-up

To fully utilize the M-ETK's potential, e.g., for triggered measurement, the ECU start-up sequence should include coordination steps between the Electronic Control Unit (which requires ETK driver integration) and the M-ETK. It ensures that both systems are synchronized and ready for measurement and calibration tasks. The process involves several key stages, some of which are optional depending on the configuration and the connected tool.

### 5.7.1 ETK-Handshake

The ETK-Handshake is the foundational step where the ECU and M-ETK establish communication. It uses specific, shared memory locations (registers) for communication, which are specific to the microcontroller ( $\mu$ C). Simulate the handshake when no ETK driver is implemented, and measure it via timer trigger. Use this simulation to check the physical connection initially and verify access to RAM and FLASH.

### 5.7.2 Advanced Code Check

With Advanced Codecheck, the ECU SW can check whether the code and data in the ECU match, and INCA can check whether the data in INCA matches to the ECU SW.

### 5.7.3 Start on any page

This feature provides flexibility in selecting the source of calibration data at start-up. Based on Data Validity information exchanged during the handshake, the ECU decides which memory page to use for its operational parameters (optional, calibration only).

### 5.7.4 Cold Start Measurement

A "cold start" (optional) is essential for capturing measurement data from the very beginning of the ECU's boot process. This is particularly useful for analyzing engine start-up behavior or other initial ECU functions.

### 5.7.5 Calibration Wake-Up

The calibration wake-up function is a special function. It allows new parameters for the ECU software to be written to the ECU. This can happen while the vehicle or control unit network is still in sleep mode. For example, this can be done in a cold chamber before a cold start measurement.

## 5.8 Support of 3rd party XCP Tools

The M-ETK is designed for flexible integration into diverse and existing tool-chains. It provides a standardized XCP on Ethernet interface. This enables users to connect various 3rd-party software tools for measurement, calibration, and software debugging.

Supported Use Cases:

- **Measurement and Calibration:** Third-party measurement and calibration tools that utilize the XCP protocol can connect directly to the M-ETK. This allows engineers to continue using their preferred tools for testing and system optimization.
- **Data logging:** XCP datalogger are supported in parallel to interactive measurement and calibration.

For more information, see ["ECU Debugging" on page 35](#)

## 5.9 M-ETK Web Interface

### *Device Status and Inventory Information*

- Device information, e.g., type, HW revision or serial number of the base board and the connected adapter
- Versions of the installed servicepack and its components (e.g. FW, FPGA)

### *Operating History*

- Total hours of operation
- Hours of operation per temperature range
- Temperature extremes
- Achievable via log files

### ***License Management***

The Web Interface allows you to monitor, configure, and maintain the M-ETK device by navigating to its IP address (192.168.40.16 configurable via XCT) in a web browser. It exposes a range of functions, provided by an underlying REST API.

- Display active licenses
- Upload and activate a license file

### ***Time Synchronization***

- Show time synchronization status
- Switch synchronization with a time master ON and OFF

### ***Maintenance and Support***

- Download log files for debugging purposes
- Servicepack update
- Reboot device

### ***Open Source Software (OSS)***

- OSS Attribution


## 6 Technical specifications

### 6.1 Hardware specifications

#### 6.1.1 Ambient Conditions


| Item                                               | Characteristics                          |
|----------------------------------------------------|------------------------------------------|
| Operating temperature range                        | - 40 °C to +110 °C<br>- 40 °F to +230 °F |
| Storage temperature range (without packaging)      | 0 °C to +50 °C<br>+32°F to +122 °F       |
| Max. relative humidity (non-condensing)            | 95%                                      |
| Max. altitude                                      | max. 5000 m/ 16400 ft                    |
| Degree of contamination (IEC 60664-1, IEC 61010-1) | 2                                        |
| Protection rating (IEC 60529)                      | Determined by installation in ECU        |

Inside the ECU housing the max. temperature is specified with 110 °C (230 °F), still air. Outside of the ECU the max. ambient temperature is assumed to be 85 °C (185 °F) at 1 m/s airflow. The power dissipation of the M-ETK is typically 5 W.

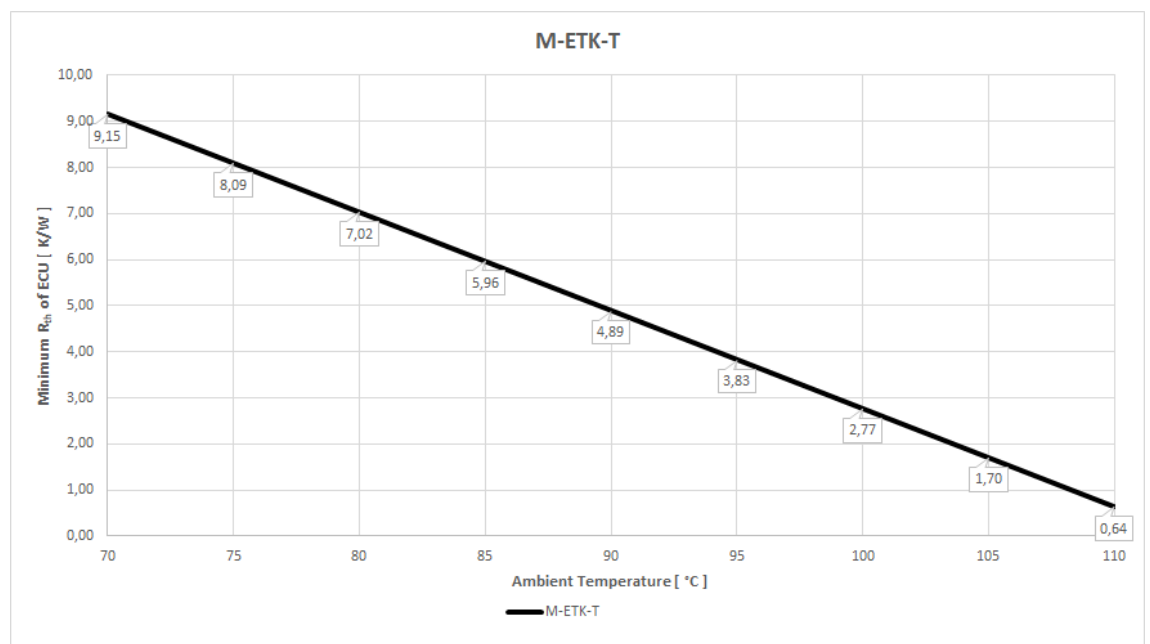

| <b>T ambiente (°C)</b> | <b>Minimum Rth Heatspreader Ambient [K/W]</b> |
|------------------------|-----------------------------------------------|
| 70 (158 °F)            | 9,15                                          |
| 75(167 °F)             | 8,09                                          |
| 80(176 °F)             | 7,02                                          |
| 85(185 °F)             | 5,96                                          |
| 90(194 °F)             | 4,89                                          |
| 95(203 °F)             | 3,83                                          |
| 100(212 °F)            | 2,77                                          |
| 105(221 °F)            | 1,70                                          |
| 110(230 °F)            | 0,64                                          |

### 6.1.2 Mechanical Data

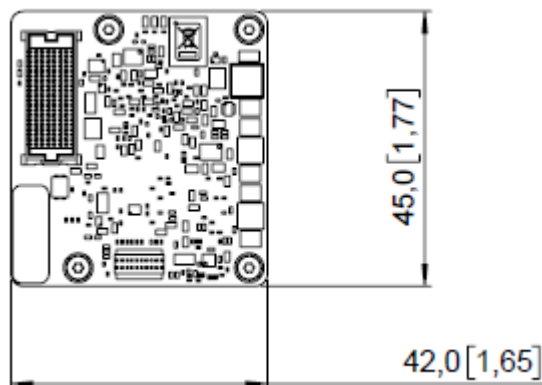


The reference measure for all drawings is millimeters.

| <b>Item</b> | <b>Dimension [mm]</b> | <b>Dimension [in]</b> |
|-------------|-----------------------|-----------------------|
| Length      | 45.00                 | 1.77                  |
| Width       | 42.00                 | 1.65                  |
| Height      | 10.85                 | 0.43                  |

### 6.1.2.1 Weight

| Item                         | Weight[g] | Weight [lb] |
|------------------------------|-----------|-------------|
| M-ETK-T1 (incl Heatspreader) | 30        | 0,066       |
| M-ETK-AB1.0 / M-ETK-AB2.0    | 10        | 0,022       |
| <b>Total</b>                 | <b>40</b> | <b>0,88</b> |

### 6.1.2.2 Hole/Drilling Pattern for the ECU-housing M-ETK-AB1.0

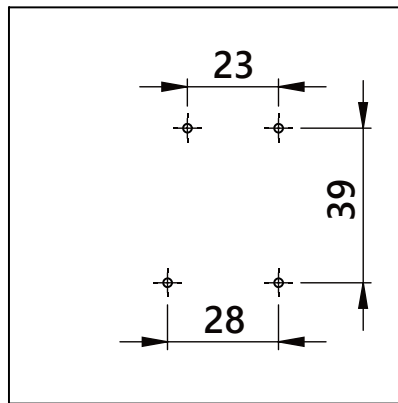


Four screws M2 .

Recommended drilling diameter for the M2 screws is 2.2 mm.

| Dimension [mm] | Tolerance [mm] | Dimension [in] | Tolerance [in] |
|----------------|----------------|----------------|----------------|
| 23             | +/- 0.20       | 0.91           | 0.07874        |
| 28             | +/- 0.20       | 1.11           | 0.07874        |
| 39             | +/- 0.20       | 1.54           | 0.07874        |

### 6.1.2.3 Hole/Drilling Pattern for the ECU-housing M-ETK-AB2.0

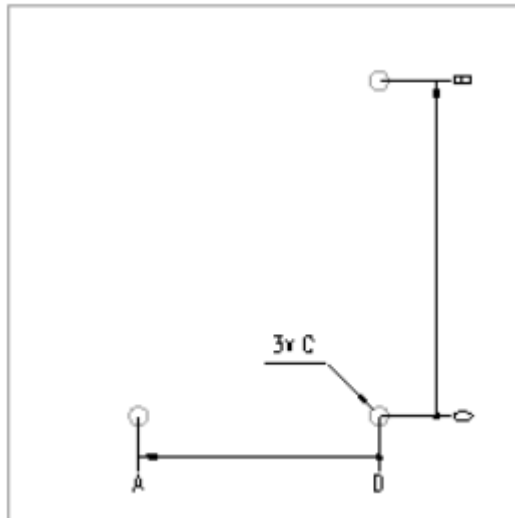

Three screws M2 .

Recommended drilling diameter for the M2 screws is 2.2 mm.

| Dimension [mm] | Tolerance [mm] | Dimension [in] | Tolerance [in] |
|----------------|----------------|----------------|----------------|
| A = 28         | +/- 0.20       | 1.102          | +/- 0.0008     |
| B = 39         | +/- 0.20       | 1.535          | +/- 0.0008     |
| C = 2.2        | + 0.20         | 0.087          | + 0.0008       |

## 6.1.3 M-ETK-T1.0 + M-ETK-AB1.0A

### 6.1.3.1 Electrical Data

| Parameter                                | Symbol            | Condition                                                                                                | Min | Typ | Max | Unit |
|------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| Permanent power supply (vehicle battery) | $U_{\text{Batt}}$ | Vehicle usage<br>1)                                                                                      | 6   | 12  | 36  | V    |
| [all values $\pm 0\%$ ]                  |                   |                                                                                                          |     |     |     |      |
| Cranking voltage                         | $U_{\text{Batt}}$ | < 3 seconds                                                                                              | 3   |     |     | V    |
| Standby current                          | $I_{\text{STBY}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>ECU off;<br>no load from ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$ | 8   | 24  | 40  | mA   |



| Parameter                                                                                                                                                                                                                                                                                                 | Symbol            | Condition                                                                                                                                               | Min                                           | Typ | Max | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----|-----|------|
| Operating current                                                                                                                                                                                                                                                                                         | $I_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>no load from ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$                                                            | 150                                           | 250 | 350 | mA   |
| Power dissipation                                                                                                                                                                                                                                                                                         | $P_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>$I = 0 \text{ mA}$ at pin VDDSTBY<br>ECU_SBRAM;<br>$T = 20 \text{ }^{\circ}\text{C}$                              | 1.8                                           | 3   | 4.2 | W    |
| Power dissipation                                                                                                                                                                                                                                                                                         | $P_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>$I = 500 \text{ mA}$ at pin VDDSTBY;<br>$I = 80 \text{ mA}$ at pin VDDPSTBY;<br>$T = 20 \text{ }^{\circ}\text{C}$ | 2.8                                           | 4   | 5.2 | W    |
| Fuse in the ETK $U_{\text{Batt}}$ supply line.<br>Only required if the power supply or ECU is not protected accordingly.                                                                                                                                                                                  |                   |                                                                                                                                                         | MINI, 2 A 58 V DC<br>(Littelfuse 0997002.WXN) |     |     |      |
| Overvoltage category<br>(AC mains supply)                                                                                                                                                                                                                                                                 | II                |                                                                                                                                                         |                                               |     |     |      |
| <sup>1)</sup> The M-ETK implements reverse voltage protection in the same range and may be used only with central load dump protection.<br>24 V vehicles require $U_{\text{Batt}}$ disturbing pulse reduction to 12 V vehicle system.<br>12 V vehicles don't require special disturbing pulse reductions. |                   |                                                                                                                                                         |                                               |     |     |      |



### Note

The M-ETK will accept power supply voltage dips (for additional details of 3 V low voltage operation, see ISO standard 16750).

### Maximum Inrush Current

It is highly recommended that the M-ETK be connected to a permanent power supply. When this is not possible, or the M-ETK must be powered off and back on in short intervals, time is required to reactivate the inrush limiting circuit of the M-ETK.

If the time between powering the ETK off and on is less than 40 seconds a high current peak can occur. If the above-mentioned fuse is used, this inrush current will not trigger the fuse. If other protection mechanisms are in place, the inrush current must be considered in the ECU design.

| <b>Time Between Powering Off and On</b> |  | <b>Inrush Current Pulse ( <math>U_{\text{Batt}} = 12 \text{ V}</math> )</b> |
|-----------------------------------------|--|-----------------------------------------------------------------------------|
| > 40 s                                  |  | 700 mA / 5 ms                                                               |
| < 40 s                                  |  | 18 A / 60 $\mu\text{s}$                                                     |

### Power Supply Pin Assignment

| Pin | Signal                     | Direction | Comment                                                                        |
|-----|----------------------------|-----------|--------------------------------------------------------------------------------|
| 1   | VDDPSTBY<br>(3.3 V supply) | Output    | Permanent power supply of ECU DAP Interface, 3.3 V                             |
| 2   | VDDSTBY<br>(1.00 V supply) | Output    | Permanent power supply of ECU EDRAM, 1.00 V                                    |
| 3   | GND                        | Input     | Power Ground                                                                   |
| 4   | CAL_WAKEUP                 | Output    | Switch to $U_{\text{Batt}}$ . ECU wake-up signal (for measurement preparation) |
| 5   | Ubatt2                     | Input     | Vehicle battery                                                                |
| 6   | Ubatt1                     | Input     | Vehicle battery                                                                |

#### 6.1.3.2 Microcontroller Interface (adapter dependent)

| Parameter                            | Symbol         | Condition                                               | Min                       | Typ | Max               | Unit |
|--------------------------------------|----------------|---------------------------------------------------------|---------------------------|-----|-------------------|------|
| ECU Standby<br>RAM Output<br>Voltage | VDDSTBY        | max 500 mA<br>load                                      | 0.94                      | 1   | 1.04              | V    |
| VDDPSTBY<br>Output Voltage           | VDDPSTBY       | max 80 mA<br>load                                       | 3.14                      | 3.3 | 3.46              | V    |
| Cal_Wakeup<br>Output Voltage         | CAL_<br>WAKEUP | $U_{\text{Batt}} = 6 - 36$<br>V;<br>load = 0 - 50<br>mA | $U_{\text{Batt}} -$<br>1V |     | $U_{\text{Batt}}$ | V    |

| Parameter                            | Symbol         | Condition     | Min  | Typ  | Max  | Unit |
|--------------------------------------|----------------|---------------|------|------|------|------|
| ECU Power Supply Supervision Voltage | VDDP           | ECU on        | 2.67 | 2.77 | 2.89 | V    |
|                                      |                | ECU off       | 2.44 | 2.56 | 2.89 | V    |
|                                      |                | abs. max.     |      |      | 5.50 |      |
|                                      | IDDP           | VDDP 3.3 V    |      |      | 800  | μA   |
| ECU Standby RAM Supervision Voltage  | VDDSTBY        | VDDSTBY       | 0.86 | 0.89 | 0.92 | V    |
|                                      | /VDDSTBY_SENSE | VDDSTBY ↓     | 0.85 | 0.88 | 0.91 | V    |
|                                      | IDDSTBY        | VDDSTBY 1.0 V |      |      | 50   | μA   |

### 6.1.3.3 Test Characteristics

| Parameter                     | Symbol              | Condition                                                                          | Min | Typ | Max | Unit |
|-------------------------------|---------------------|------------------------------------------------------------------------------------|-----|-----|-----|------|
| Start-up Time 1 <sup>1)</sup> | t <sub>Reset1</sub> | U <sub>Batt</sub> = 12 V<br>VDDP = 0 V<br>3.3 V/5.0 V<br>without transferring FPGA | 0   | 5   | 10  | ms   |
| Start-up Time 2 <sup>1)</sup> | t <sub>Reset2</sub> | U <sub>Batt</sub> = 0 V 12 V<br>transfer<br>BOO FPGA+SoC                           |     | 20  |     | s    |

<sup>1)</sup> PORESET is not pulled low during M-ETK start up time.

### 6.1.3.4 SWD Timing Characteristics

The M-ETK supports the 2-pin SWD mode: one data pin (direction via protocol), one clock pin.

| Parameter                 | Symbol | Value<br>SR6X7[ns] | Value<br>SR6P7 [ns] | Comment        |
|---------------------------|--------|--------------------|---------------------|----------------|
| SWCLK Clock Period (typ.) | tCLK   | 14.3 <sup>1)</sup> | 8.0 <sup>2)</sup>   | ETK --> Target |
| SWDIO Set-Up Time         | tSU    | 4.0                | 2.3                 | ETK --> Target |
| SWDIO Hold Time           | tH     | 1.5                | 2.3                 | ETK --> Target |
| SWDIO Clock-to-Out Time   | tCO    | 12.4               | 11.5                | Target --> ETK |

| Parameter                          | Symbol | Value<br>SR6X7[ns] | Value<br>SR6P7 [ns] | Comment        |
|------------------------------------|--------|--------------------|---------------------|----------------|
| SWDIO Output Hold Time             | tOH    | 4.3                | 3                   | Target --> ETK |
| SWDIO data unstable window         |        |                    | 3                   |                |
| 1) : @ 70 MHz SWD Clock Frequency  |        |                    |                     |                |
| 2) : @ 125 MHz SWD Clock Frequency |        |                    |                     |                |

### 6.1.3.5 Aurora Trace Timing Parameter

| Parameter                   | Value | Unit   | Signal Impedance [Ohm] |
|-----------------------------|-------|--------|------------------------|
| Clock                       | 100   | MHz    | 100 (differential)     |
| Data rate DATA[3...0] (max) | 3.125 | Gbit/s | 100 (differential)     |

### 6.1.3.6 Electrical Characteristics

#### ECU Interface Connector SWD Interface

| Signal              | Pin<br>Type       | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min)<br>(max)<br>[μA] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------------|-------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------------------------------------------------|------------------------------------------------------------------|
| SWCLK<br>(TCK)      | XO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | -                               | -                               | 5.5                             | +705 /<br>+495                                         | 35                                                               |
| SWDIO<br>(TMS)      | IXO <sup>1)</sup> | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | -43 / -<br>18                                          | 35                                                               |
| RESERVE-<br>D (TDO) | IXO <sup>1)</sup> | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +10 / -<br>10                                          | 35                                                               |
| RESERVE-<br>D (TDI) | XO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | -                               | 2                               | 5.5                             | +10 / -<br>10                                          | 35                                                               |
| /TRST               | XO <sup>2)</sup>  | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 5.5                             | -705 / -<br>569                                        | 21                                                               |

| Signal        | Pin<br>Type           | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min) /<br>(max)<br>[μA] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------|-----------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------------------------------|------------------------------------------------------------------|
| /RESET-<br>UT | IXOD <sup>3)</sup>    | 0.7                             | -                               | -                               | 0.8                             | 2                               | 5.5                             | +21 / -<br>20                                            | 21                                                               |
| /PORESE-<br>T | IXOD <sup>3)</sup>    | 0.7                             | -                               | -                               | 0.8                             | 2                               | 5.5                             | +21 / -<br>20                                            | 25                                                               |
| WDGDIS        | XO <sup>2)</sup><br>) | 0.5                             | 2.4                             | 3.3                             | -                               | -                               | 5.5                             | +10 / -<br>10                                            | 21                                                               |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 16mA

<sup>2)</sup> max 24 mA

<sup>3)</sup> max 0.2 A

## ECU Interface Connector JTAG Interface

| Signal              | Pin<br>Type       | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min) /<br>(max)<br>[μA] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------------|-------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------------------------------|------------------------------------------------------------------|
| SWCLK<br>(TCK)      | XO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | -                               | -                               | 5.5                             | +705 /<br>+495                                           | 35                                                               |
| SWDIO<br>(TMS)      | IXO <sup>1)</sup> | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | -43 / -<br>18                                            | 35                                                               |
| RESERVE-<br>D (TDO) | IXO <sup>1)</sup> | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +10 / -<br>10                                            | 35                                                               |
| RESERVE-<br>D (TDI) | XO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | -                               | 2                               | 5.5                             | +10 / -<br>10                                            | 35                                                               |
| /TRST               | XO <sup>2)</sup>  | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 5.5                             | -705 / -<br>569                                          | 21                                                               |

| Signal    | Pin Type              | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leakage current<br>(min) / (max)<br>[μA] | Additional load by ETK <sup>1)</sup><br>(typ)<br>[pF] |
|-----------|-----------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|------------------------------------------|-------------------------------------------------------|
| /RESETOUT | IXOD <sup>3)</sup>    | 0.7                             | -                               | -                               | 0.8                             | 2                               | 5.5                             | +21 / - 20                               | 21                                                    |
| /PORESET  | IXOD <sup>3)</sup>    | 0.7                             | -                               | -                               | 0.8                             | 2                               | 5.5                             | +21 / - 20                               | 25                                                    |
| WDGDIS    | XO <sup>2)</sup><br>) | 0.5                             | 2.4                             | 3.3                             | -                               | -                               | 5.5                             | +10 / - 10                               | 21                                                    |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 16mA

<sup>2)</sup> max 24 mA

<sup>3)</sup> max 0.2 A

## ECU Interface Connector Pin Assignment

| Pin | JTAG Mode | SWD Mode       | Direction | Comment                  |
|-----|-----------|----------------|-----------|--------------------------|
| 1   | GND       | GND            | Power     | Signal Ground            |
| 2   | TCK       | SWCLK          | Output    | depending interface mode |
| 3   | /TRST     | /TRST          | Output    | depending interface mode |
| 4   | TDO       | RESERVED (TDO) | Bidir     | depending interface mode |
| 5   | TMS       | SWDIO          | Bidir     | depending interface mode |
| 6   | TDI       | RESERVED (TDI) | Bidir     | depending interface mode |
| 7   | WDGDIS    | WDGDIS         | Output    | Watchdog disable Signal  |

| Pin | JTAG Mode    | SWD Mode     | Direction | Comment                                                                    |
|-----|--------------|--------------|-----------|----------------------------------------------------------------------------|
| 8   | VDDP (Sense) | VDDP (Sense) | Input     | Sense for Switched power supply of ECU (ignition)                          |
| 9   | /RESETOUT    | /RESETOUT    | Bidir     | ECU Reset signal (open drain) for Reset assertion and supervision          |
| 10  | /PORESET     | /PORESET     | Bidir     | ECU Power On Reset signal (open drain) for Reset assertion and supervision |

### ECU Interface Connector Aurora Trace

| Signal      | Pin Type | V <sub>ID</sub> (min)<br>[mV] | V <sub>ID</sub> (max)<br>[mV] | V <sub>OD</sub> (max)<br>[mV] |
|-------------|----------|-------------------------------|-------------------------------|-------------------------------|
| Clock-P/-N  | XO       | -                             | -                             | 490                           |
| DATA[3...0] | I        | 140                           | 1250                          | -                             |

Pin type:

I: Input, X: Tristate, O: Output, OD: Open Drain

| Signal           | Pin Type         | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leakage current<br>(min / max)<br>[μA] | Additional load by ETK <sup>1)</sup><br>(typ)<br>[pF] |
|------------------|------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------------|-------------------------------------------------------|
| AUR_<br>RESERVED | XO <sup>1)</sup> | 0.6                             | 2.4                             | 3.1                             | -                               | -                               | 6.5                             | +159 / +99                             | 24                                                    |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 24 mA

### ECU Interface Connector Aurora Trace Pin Assignment

| Pin | Signal       | Direction | Comment            |
|-----|--------------|-----------|--------------------|
| 1   | GND          | -         | Signal Ground      |
| 2   | GND          | -         | Signal Ground      |
| 3   | Data1-N      | Input     | Aurora Data Lane 1 |
| 4   | Data0-P      | Input     | Aurora Data Lane 0 |
| 5   | Data1-P      | Input     | Aurora Data Lane 1 |
| 6   | Data0-N      | Input     | Aurora Data Lane 0 |
| 7   | GND          | -         | Signal Ground      |
| 8   | GND          | -         | Signal Ground      |
| 9   | Data2-P      | Input     | Aurora Data Lane 2 |
| 10  | GND          | -         | Signal Ground      |
| 11  | Data2-N      | Input     | Aurora Data Lane 2 |
| 12  | Clock-N      | Output    | Aurora Clock       |
| 13  | GND          | -         | Signal Ground      |
| 14  | Clock-P      | Output    | Aurora Clock       |
| 15  | Data3-N      | Input     | Aurora Data Lane 3 |
| 16  | GND          | -         | Signal Ground      |
| 17  | Data3-P      | Input     | Aurora Data Lane 3 |
| 18  | -            | -         | not connected      |
| 19  | GND          | -         | Signal Ground      |
| 20  | AUR_Reserved | Output    | do not use         |

#### 6.1.4 M-ETK-T1.0 + M-ETK-AB1.0B

##### 6.1.4.1 Electrical Data

| Parameter                                | Symbol            | Condition                   | Min                     | Typ | Max | Unit |
|------------------------------------------|-------------------|-----------------------------|-------------------------|-----|-----|------|
| Permanent power supply (vehicle battery) | $U_{\text{Batt}}$ | Vehicle usage <sup>1)</sup> | 6                       | 12  | 36  | V    |
|                                          |                   |                             | [all values $\pm 0\%$ ] |     |     |      |
| Cranking voltage                         | $U_{\text{Batt}}$ | < 3 seconds                 | 3                       |     |     | V    |



| Parameter                                                                                                                                                                                                                                                                                                    | Symbol            | Condition                                                                                                                                                       | Min                                           | Typ | Max | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----|-----|------|
| Standby current                                                                                                                                                                                                                                                                                              | $I_{\text{STBY}}$ | $U_{\text{Batt}} = 12 \text{ V};$<br>ECU off;<br>no load from<br>ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$                                                      | 8                                             | 24  | 40  | mA   |
| Operating current                                                                                                                                                                                                                                                                                            | $I_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V};$<br>no load from<br>ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$                                                                  | 150                                           | 250 | 350 | mA   |
| Power dissipation                                                                                                                                                                                                                                                                                            | $P_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V};$<br>$I = 0 \text{ mA}$ at pin<br>VDDSTBY<br>ECU_SBRAM;<br>$T = 20 \text{ }^{\circ}\text{C}$                                    | 1.8                                           | 3   | 4.2 | W    |
| Power dissipation                                                                                                                                                                                                                                                                                            | $P_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V};$<br>$I = 500 \text{ mA}$ at<br>pin VDDSTBY;<br>$I = 80 \text{ mA}$ at<br>pin<br>VDDPSTBY;<br>$T = 20 \text{ }^{\circ}\text{C}$ | 2.9                                           | 4.1 | 5.3 | W    |
| Fuse in the ETK $U_{\text{Batt}}$ supply line.<br>Only required if the power supply or ECU is not<br>protected accordingly.                                                                                                                                                                                  |                   |                                                                                                                                                                 | MINI, 2 A 58 V DC<br>(Littelfuse 0997002.WXN) |     |     |      |
| Overvoltage category<br>(AC mains supply)                                                                                                                                                                                                                                                                    | II                |                                                                                                                                                                 |                                               |     |     |      |
| <sup>1)</sup> The M-ETK implements reverse voltage protection in the same range and<br>may be used only with central load dump protection.<br>24 V vehicles require $U_{\text{Batt}}$ disturbing pulse reduction to 12 V vehicle system.<br>12 V vehicles don't require special disturbing pulse reductions. |                   |                                                                                                                                                                 |                                               |     |     |      |

### Note

The M-ETK will accept power supply voltage dips (for additional details of 3 V low voltage operation, see ISO standard 16750).

### Maximum Inrush Current

It is highly recommended that the M-ETK be connected to a permanent power supply. When this is not possible, or the M-ETK must be powered off and back on in short intervals, time is required to reactivate the inrush limiting circuit of the M-ETK.

If the time between powering the ETK off and on is less than 40 seconds a high current peak can occur. If the above-mentioned fuse is used, this inrush current will not trigger the fuse. If other protection mechanisms are in place, the inrush current must be considered in the ECU design.

| Time Between Powering Off and On | Inrush Current Pulse ( $U_{\text{Batt}} = 12 \text{ V}$ ) |
|----------------------------------|-----------------------------------------------------------|
| > 40 s                           | 700 mA / 5 ms                                             |
| < 40 s                           | 18 A / 60 $\mu\text{s}$                                   |

### Power Supply Pin Assignment

| Pin | Signal                                   | Direction | Comment                                                                           |
|-----|------------------------------------------|-----------|-----------------------------------------------------------------------------------|
| 1   | VDDPSTBY<br>(3.3 V supply,<br>80mA max.) | Output    | Permanent power supply of ECU<br>DAP Interface, 3.3 V                             |
| 2   | VDDSTBY<br>(1.3 V supply,<br>500mA max.) | Output    | Permanent power supply of ECU<br>EDRAM                                            |
| 3   | GND                                      | Input     | Power Ground                                                                      |
| 4   | CAL_WAKEUP                               | Output    | Switch to $U_{\text{Batt}}$ . ECU wake-up signal<br>(for measurement preparation) |
| 5   | Ubatt2                                   | Input     | Vehicle battery                                                                   |
| 6   | Ubatt1                                   | Input     | Vehicle battery                                                                   |

#### 6.1.4.2 Microcontroller Interface (adapter dependent)

| Parameter                                    | Symbol             | Condition                                        | Min                | Typ  | Max        | Unit    |
|----------------------------------------------|--------------------|--------------------------------------------------|--------------------|------|------------|---------|
| ECU Standby<br>RAM Output<br>Voltage         | VDDSTBY            | max 500 mA<br>load                               | 0.94               | 1    | 1.04       | V       |
| VDDPSTBY<br>Output Voltage                   | VDDPSTBY           | max 80 mA<br>load                                | 3.14               | 3.3  | 3.46       | V       |
| Cal_Wakeup<br>Output Voltage                 | CAL_<br>WAKEUP     | $U_{Batt} = 6 - 36$<br>V;<br>load = 0 - 50<br>mA | $U_{Batt} -$<br>1V |      | $U_{Batt}$ | V       |
| ECU Power Sup-<br>ply Supervision<br>Voltage | VDDP               | ECU on                                           | 2.67               | 2.77 | 2.89       | V       |
|                                              |                    | ECU off                                          | 2.44               | 2.56 | 2.89       | V       |
|                                              |                    | abs. max.                                        |                    |      | 5.50       |         |
|                                              | IDDP               | VDDP 3.3 V                                       |                    |      | 800        | $\mu$ A |
| ECU Standby<br>RAM Supervision<br>Voltage    | VDDSTBY            | VDDSTBY                                          | 1.04               | 1.07 | 1.10       | V       |
|                                              | /VDDSTBY_<br>SENSE | VDDSTBY ↓                                        | 1.03               | 1.06 | 1.09       | V       |
|                                              | IDDSTBY            | VDDSTBY 1.0<br>V                                 |                    |      | 50         | $\mu$ A |

#### 6.1.4.3 Test Characteristics

| Parameter                 | Symbol         | Condition                                                                      | Min | Typ | Max | Unit |
|---------------------------|----------------|--------------------------------------------------------------------------------|-----|-----|-----|------|
| Start-up Time 1<br>1)     | $t_{startup1}$ | $U_{Batt} = 12$ V<br>Standby<br>configured<br><br>ECU_<br>VDDP<br>goes<br>high | 0   | 5   | 10  | ms   |
| Start-up Time<br>2)<br>1) | $t_{startup2}$ | $U_{Batt}$ goes high                                                           | 10  | 20  | 50  | s    |

1) PORESET is not pulled low during M-ETK start up time.

#### 6.1.4.4 SWD Timing Characteristics

The M-ETK supports the 2-pin SWD mode: one data pin (direction via protocol), one clock pin.

| Parameter                                     | Symbol | Value<br>SR6X7[ns] | Value<br>SR6P7 [ns] | Comment        |
|-----------------------------------------------|--------|--------------------|---------------------|----------------|
| SWCLK Clock Period (typ.)                     | tCLK   | 14.3 <sup>1)</sup> | 8.0 <sup>2)</sup>   | ETK --> Target |
| SWDIO Set-Up Time                             | tSU    | 4.0                | 2.3                 | ETK --> Target |
| SWDIO Hold Time                               | tH     | 1.5                | 2.3                 | ETK --> Target |
| SWDIO Clock-to-Out Time                       | tCO    | 12.4               | 11.5                | Target --> ETK |
| SWDIO Output Hold Time                        | tOH    | 4.3                | 3                   | Target --> ETK |
| SWDIO data unstable window                    |        |                    | 3                   |                |
| <sup>1)</sup> : @ 70 MHz SWD Clock Frequency  |        |                    |                     |                |
| <sup>2)</sup> : @ 125 MHz SWD Clock Frequency |        |                    |                     |                |

#### 6.1.4.5 Aurora Trace Timing Parameter

| Parameter                   | Value | Unit   | Signal Impedance [Ohm] |
|-----------------------------|-------|--------|------------------------|
| Clock                       | 100   | MHz    | 100 (differential)     |
| Data rate DATA[3...0] (max) | 3.125 | Gbit/s | 100 (differential)     |

### 6.1.4.6 Electrical Characteristics

#### ECU Interface Connector SWD / JTAG Interface

| Signal         | Pin Type           | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leakage current<br>(min) / (max)<br>[μA] | Additional load by ETK <sup>1)</sup><br>(typ)<br>[pF] |
|----------------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|------------------------------------------|-------------------------------------------------------|
| DAP0 (TCK)     | XO <sup>1)</sup>   | 0.4                             | 2.8                             | 3.3                             | -                               | -                               | 5.5                             | +705 / +495                              | 35                                                    |
| DAP1 (TMS)     | IXO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | -3310 / -2390                            | 35                                                    |
| DAP2 (TDO)     | IXO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +3310 / -2390                            | 35                                                    |
| RESERVED (TDI) | XO <sup>1)</sup>   | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +10 / -10                                | 35                                                    |
| /TRST          | XO <sup>2)</sup>   | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 6.5                             | -705 / -569                              | 21                                                    |
| /RESETOUT      | IXOD <sup>3)</sup> | 0.7                             | -                               | -                               | 0.8                             | 2                               | 6.5                             | +21 / -20                                | 21                                                    |
| /PORESET       | IXOD <sup>3)</sup> | 0.7                             | -                               | -                               | 0.8                             | 2                               | 6.5                             | +21 / -20                                | 25                                                    |
| WDGDIS         | XO <sup>2)</sup>   | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 6.5                             | +10 / -10                                | 21                                                    |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 16mA

<sup>2)</sup> max 24 mA

<sup>3)</sup> max 0.2 A

### ECU Interface Connector Pin Assignment

| Pin | DAP Mode       | Direction | Comment                                                                    |
|-----|----------------|-----------|----------------------------------------------------------------------------|
| 1   | GND            | Power     | Signal Ground                                                              |
| 2   | DAP0           | Output    | DAP signal                                                                 |
| 3   | /TRST          | Output    | DAP signal                                                                 |
| 4   | DAP2           | Bidir     | DAP signal                                                                 |
| 5   | DAP1           | Bidir     | DAP signal                                                                 |
| 6   | Reserved (TDI) | Bidir     | Reserved                                                                   |
| 7   | WDGDIS         | Output    | Watchdog disable Signal                                                    |
| 8   | VDDP (Sense)   | Input     | Sense for Switched power supply of ECU (ignition)                          |
| 9   | /ESR0          | Bidir     | ECU Reset signal (open drain) for Reset assertion and supervision          |
| 10  | /PORESET       | Bidir     | ECU Power On Reset signal (open drain) for Reset assertion and supervision |

### ECU Interface Connector Aurora Trace

| Signal      | Pin Type | V <sub>ID</sub> (min)<br>[mV] | V <sub>ID</sub> (max)<br>[mV] | V <sub>OD</sub> (max)<br>[mV] |
|-------------|----------|-------------------------------|-------------------------------|-------------------------------|
| Clock-P/-N  | XO       | -                             | -                             | 490                           |
| DATA[3...0] | I        | 140                           | 1250                          | -                             |

Pin type:

I: Input, X: Tristate, O: Output, OD: Open Drain

| Signal                          | Pin<br>Type         | $V_{OL}$<br>(mA)<br>[V] | $V_{OH}$<br>(mA)<br>[V] | $V_{OH}$<br>(mA)<br>[V] | $V_{IL}$<br>(mA)<br>[V] | $V_{IH}$<br>(mA)<br>[V] | $V_{IH}$<br>(mA)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min /<br>max)<br>[μA] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------------------------|---------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------------------------------------|------------------------------------------------------------------|
| AU-<br>R_<br>RES-<br>ERV-<br>ED | XO<br><sup>1)</sup> | 0.6                     | 2.4                     | 3.3                     | -                       | -                       | 6.5                     | +159 /<br>+99                                          | 24                                                               |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 24 mA

### ECU Interface Connector Aurora Trace Pin Assignment

| Pin | Signal  | Direction | Comment            |
|-----|---------|-----------|--------------------|
| 1   | GND     | -         | Signal Ground      |
| 2   | GND     | -         | Signal Ground      |
| 3   | Data1-N | Input     | do not use         |
| 4   | Data0-P | Input     | Aurora Data Lane 0 |
| 5   | Data1-P | Input     | do not use         |
| 6   | Data0-N | Input     | Aurora Data Lane 0 |
| 7   | GND     | -         | Signal Ground      |
| 8   | GND     | -         | Signal Ground      |
| 9   | Data2-P | Input     | do not use         |
| 10  | GND     | -         | Signal Ground      |
| 11  | Data2-N | Input     | do not use         |
| 12  | Clock-N | Output    | Aurora Clock       |
| 13  | GND     | -         | Signal Ground      |
| 14  | Clock-P | Output    | Aurora Clock       |
| 15  | Data3-N | Input     | do not use         |
| 16  | GND     | -         | Signal Ground      |

| Pin | Signal       | Direction | Comment          |
|-----|--------------|-----------|------------------|
| 17  | Data3-P      | Input     | do not use       |
| 18  | -            | -         | not connected    |
| 19  | GND          | -         | Signal Ground    |
| 20  | AUR_Reserved | Output    | Aurora CRC error |

## 6.1.5 M-ETK-T1.0 + M-ETK-AB2.0A

### 6.1.5.1 Electrical Data

| Parameter                                | Symbol     | Condition                                                                                                                                                | Min                     | Typ | Max | Unit |
|------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----|-----|------|
| Permanent power supply (vehicle battery) | $U_{Batt}$ | Vehicle usage <sup>1)</sup>                                                                                                                              | 6                       | 12  | 36  | V    |
|                                          |            |                                                                                                                                                          | [all values $\pm 0\%$ ] |     |     |      |
| Cranking voltage                         | $U_{Batt}$ | < 3 seconds                                                                                                                                              | 3                       |     |     | V    |
| Standby current                          | $I_{STBY}$ | $U_{Batt} = 12\text{ V}$ ;<br>ECU off;<br>no load from ECU;<br>$T = 20\text{ }^{\circ}\text{C}$                                                          | 8                       | 24  | 40  | mA   |
| Operating current                        | $I_{Batt}$ | $U_{Batt} = 12\text{ V}$ ;<br>no load from ECU;<br>$T = 20\text{ }^{\circ}\text{C}$                                                                      | 175                     | 275 | 375 | mA   |
| Power dissipation                        | $P_{Batt}$ | $U_{Batt} = 12\text{ V}$ ;<br>no load from ECU;<br>$T = 20\text{ }^{\circ}\text{C}$                                                                      | 2.1                     | 3.3 | 4.5 | W    |
| Power dissipation                        | $P_{Batt}$ | $U_{Batt} = 12\text{ V}$ ;<br>$I = 500\text{ mA}$ at pin VDDSTBY (1V);<br>$I = 80\text{ mA}$ at pin VDDPSTBY (3.3V);<br>$T = 20\text{ }^{\circ}\text{C}$ | 3.1                     | 4.3 | 5.5 | W    |



| Parameter                                                                                                                               | Symbol | Condition | Min                                           | Typ | Max | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|-----------------------------------------------|-----|-----|------|
| Fuse in the ETK $U_{Batt}$ supply line.<br>Only required if the power supply or ECU is not protected accordingly.                       |        |           | MINI, 2 A 58 V DC<br>(Littelfuse 0997002.WXN) |     |     |      |
| Overvoltage category<br>(AC mains supply)                                                                                               |        | II        |                                               |     |     |      |
| <sup>1)</sup> The M-ETK implements reverse voltage protection in the same range and may be used only with central load dump protection. |        |           |                                               |     |     |      |

**Note**

The M-ETK will accept power supply voltage dips (for additional details of 3 V low voltage operation, see ISO standard 16750).

**Maximum Inrush Current**

It is highly recommended that the M-ETK be connected to a permanent power supply. When this is not possible, or the M-ETK must be powered off and back on in short intervals, time is required to reactivate the inrush limiting circuit of the M-ETK.

If the time between powering the ETK off and on is less than 40 seconds a high current peak can occur. If the above-mentioned fuse is used, this inrush current will not trigger the fuse. If other protection mechanisms are in place, the inrush current must be considered in the ECU design.

| Time Between Powering Off and On | Inrush Current Pulse ( $U_{Batt} = 12 V$ ) |
|----------------------------------|--------------------------------------------|
| > 40 s                           | 700 mA / 5 ms                              |
| < 40 s                           | 18 A / 60 $\mu s$                          |

### Power Supply Pin Assignment

| Pin | Signal                                    | Direction | Comment                                                                    |
|-----|-------------------------------------------|-----------|----------------------------------------------------------------------------|
| 1   | VDDPSTBY<br>(3.3 V supply,<br>80mA max.)  | Output    | Permanent power supply of ECU<br>DAP Interface, 3.3 V                      |
| 2   | VDDSTBY<br>(1.00 V supply,<br>500mA max.) | Output    | Permanent power supply of ECU<br>EDRAM, 1.00 V                             |
| 3   | GND                                       | Input     | Power Ground                                                               |
| 4   | CAL_WAKEUP                                | Output    | Switch to $U_{Batt}$ . ECU wake-up signal<br>(for measurement preparation) |
| 5   | Ubatt2                                    | Input     | Vehicle battery                                                            |
| 6   | Ubatt1                                    | Input     | Vehicle battery                                                            |

#### 6.1.5.2 Microcontroller Interface (adapter dependent)

| Parameter                                    | Symbol             | Condition                                        | Min                | Typ  | Max        | Unit    |
|----------------------------------------------|--------------------|--------------------------------------------------|--------------------|------|------------|---------|
| ECU Standby<br>RAM Output<br>Voltage         | VDDSTBY            | max 500 mA<br>load                               | 0.94               | 1    | 1.04       | V       |
| VDDPSTBY<br>Output Voltage                   | VDDPSTBY           | max 80 mA<br>load                                | 3.14               | 3.3  | 3.46       | V       |
| Cal_Wakeup<br>Output Voltage                 | CAL_<br>WAKEUP     | $U_{Batt} = 6 - 36$<br>V;<br>load = 0 - 50<br>mA | $U_{Batt} -$<br>1V |      | $U_{Batt}$ | V       |
| ECU Power Sup-<br>ply Supervision<br>Voltage | VDDP<br>(Sense)    | ECU on                                           | 2.67               | 2.77 | 2.89       | V       |
|                                              |                    | ECU off                                          | 2.44               | 2.56 | 2.89       | V       |
|                                              |                    | abs. max.                                        |                    |      | 5.50       |         |
|                                              | IDDP               | VDDP 3.3 V                                       |                    |      | 800        | $\mu$ A |
| ECU Standby<br>RAM Supervision<br>Voltage    | VDDSTBY            | VDDSTBY                                          | 0.86               | 0.89 | 0.92       | V       |
|                                              | /VDDSTBY_<br>SENSE | VDDSTBY ↓                                        | 0.85               | 0.88 | 0.91       | V       |
|                                              | IDDSTBY            | VDDSTBY 1.0<br>V                                 |                    |      | 50         | $\mu$ A |

### 6.1.5.3 Test Characteristics

| Parameter                     | Symbol                | Condition                                                            | Min | Typ | Max | Unit |
|-------------------------------|-----------------------|----------------------------------------------------------------------|-----|-----|-----|------|
| Start-up Time 1 <sup>1)</sup> | t <sub>startup1</sub> | U <sub>Batt</sub> = 12 V<br>Standby configured<br>ECU_VDDP goes high | 0   | 5   | 10  | ms   |
| Start-up Time 2 <sup>1)</sup> | t <sub>stratup2</sub> | U <sub>Batt</sub> goes high                                          | 10  | 20  | 50  | ms   |

<sup>1)</sup> PORESET is not pulled low during M-ETK start up time.

### 6.1.5.4 SWD Timing Characteristics

The M-ETK supports the 2-pin SWD mode: one data pin (direction via protocol), one clock pin.

| Parameter                  | Symbol | Value<br>SR6X7[ns] | Value<br>SR6P7 [ns] | Comment        |
|----------------------------|--------|--------------------|---------------------|----------------|
| SWCLK Clock Period (typ.)  | tCLK   | 14.3 <sup>1)</sup> | 8.0 <sup>2)</sup>   | ETK --> Target |
| SWDIO Set-Up Time          | tSU    | 4.0                | 2.3                 | ETK --> Target |
| SWDIO Hold Time            | tH     | 1.5                | 2.3                 | ETK --> Target |
| SWDIO Clock-to-Out Time    | tCO    | 12.4               | 11.5                | Target --> ETK |
| SWDIO Output Hold Time     | tOH    | 4.3                | 3                   | Target --> ETK |
| SWDIO data unstable window |        |                    | 3                   |                |

<sup>1)</sup> : @ 70 MHz SWD Clock Frequency

<sup>2)</sup> : @ 125 MHz SWD Clock Frequency

### 6.1.5.5 Aurora Trace Timing Parameter

| Parameter                   | Value | Unit   | Signal Impedance [Ohm] |
|-----------------------------|-------|--------|------------------------|
| Clock                       | 100   | MHz    | 100 (differential)     |
| Data rate DATA[3...0] (max) | 3.125 | Gbit/s | 100 (differential)     |

### 6.1.5.6 Electrical Characteristics

#### ECU Interface Connector SWD / JTAG Interface

| Signal              | Pin Type              | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min) /<br>(max)<br>[μA] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------------|-----------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------------------------------|------------------------------------------------------------------|
| SWCLK<br>(TCK)      | XO <sup>1)</sup>      | 0.4                             | 2.8                             | 3.3                             | -                               | -                               | 5.5                             | +705 /<br>+495                                           | 36                                                               |
| SWDIO<br>(TMS)      | IXO <sup>1)</sup>     | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | -43 / -<br>18                                            | 36                                                               |
| RESERVE-<br>D (TDO) | IXO <sup>1)</sup>     | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +10 / -<br>10                                            | 36                                                               |
| RESERVE-<br>D (TDI) | XO <sup>1)</sup>      | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +10 / -<br>10                                            | 36                                                               |
| /TRST               | XO <sup>2)</sup>      | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 6.5                             | -705 / -<br>569                                          | 22                                                               |
| /RESETO-<br>UT      | IXOD <sup>3)</sup>    | 0.7                             | -                               | -                               | 0.8                             | 2                               | 6.5                             | +21 / -<br>20                                            | 21                                                               |
| /PORESET            | IXOD <sup>3)</sup>    | 0.7                             | -                               | -                               | 0.8                             | 2                               | 6.5                             | +21 / -<br>20                                            | 21                                                               |
| WDGDIS              | XO <sup>2)</sup><br>) | 0.5                             | 2.4                             | 3.3                             | -                               | -                               | 6.5                             | +10 / -<br>10                                            | 21                                                               |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 16mA

<sup>2)</sup> max 24 mA

<sup>3)</sup> max 0.2 A

### ECU Interface Connector Pin Assignment

| Pin | JTAG Mode    | SWD Mode       | Direction | Comment                                                                    |
|-----|--------------|----------------|-----------|----------------------------------------------------------------------------|
| 1   | GND          | GND            | Power     | Signal Ground                                                              |
| 2   | TCK          | SWCLK          | Output    | depending interface mode                                                   |
| 3   | /TRST        | /TRST          | Output    | depending interface mode                                                   |
| 4   | TDO          | RESERVED (TDO) | Bidir     | depending interface mode                                                   |
| 5   | TMS          | SWDIO          | Bidir     | depending interface mode                                                   |
| 6   | TDI          | RESERVED (TDI) | Bidir     | depending interface mode                                                   |
| 7   | WDGDIS       | WDGDIS         | Output    | Watchdog disable Signal                                                    |
| 8   | VDDP (Sense) | VDDP (Sense)   | Input     | Sense for Switched power supply of ECU (ignition)                          |
| 9   | /RESETOUT    | /RESETOUT      | Bidir     | ECU Reset signal (open drain) for Reset assertion and supervision          |
| 10  | /PORESET     | /PORESET       | Bidir     | ECU Power On Reset signal (open drain) for Reset assertion and supervision |

### ECU Interface Connector Aurora Trace

| Signal           | Pin Type | V <sub>ID</sub> (min)<br>[mV] | V <sub>ID</sub> (max)<br>[mV] | V <sub>OD</sub> (max)<br>[mV] |
|------------------|----------|-------------------------------|-------------------------------|-------------------------------|
| Clock-P/-N       | XO       | -                             | -                             | 490                           |
| DATA[3...0]-P/-N | I        | 140                           | 1250                          | -                             |

Pin type:  
I: Input, X: Tristate, O: Output, OD: Open Drain

| Signal                          | Pin<br>Type         | $V_{OL}$<br>(max)<br>[V] | $V_{OH}$<br>(min)<br>[V] | $V_{OH}$<br>(max)<br>[V] | $V_{IL}$<br>(max)<br>[V] | $V_{IH}$<br>(min)<br>[V] | $V_{IH}$<br>(max)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min /<br>max)<br>[ $\mu$ A] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------------------------|---------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------------------------------------------|------------------------------------------------------------------|
| AU-<br>R_<br>RES-<br>ERV-<br>ED | XO<br><sup>1)</sup> | 0.6                      | 2.4                      | 3.1                      | -                        | -                        | 6.5                      | +159 /<br>+99                                                | 24                                                               |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 24 mA

### ECU Interface Connector Aurora Trace Pin Assignment

| Pin | Signal  | Direction | Comment            |
|-----|---------|-----------|--------------------|
| 1   | GND     | -         | Signal Ground      |
| 2   | GND     | -         | Signal Ground      |
| 3   | Data1-N | Input     | Aurora Data Lane 1 |
| 4   | Data0-P | Input     | Aurora Data Lane 0 |
| 5   | Data1-P | Input     | Aurora Data Lane 1 |
| 6   | Data0-N | Input     | Aurora Data Lane 0 |
| 7   | GND     | -         | Signal Ground      |
| 8   | GND     | -         | Signal Ground      |
| 9   | Data2-P | Input     | Aurora Data Lane 2 |
| 10  | GND     | -         | Signal Ground      |
| 11  | Data2-N | Input     | Aurora Data Lane 2 |
| 12  | Clock-N | Output    | Aurora Clock       |
| 13  | GND     | -         | Signal Ground      |
| 14  | Clock-P | Output    | Aurora Clock       |
| 15  | Data3-N | Input     | Aurora Data Lane 3 |
| 16  | GND     | -         | Signal Ground      |

| Pin | Signal       | Direction | Comment            |
|-----|--------------|-----------|--------------------|
| 17  | Data3-P      | Input     | Aurora Data Lane 3 |
| 18  | -            | -         | not connected      |
| 19  | GND          | -         | Signal Ground      |
| 20  | AUR_Reserved | Output    | do not use         |

## 6.1.6 M-ETK-T1.0 + M-ETK-AB2.0B

### 6.1.6.1 Electrical Data

| Parameter                                | Symbol            | Condition                                                                                                                                                           | Min                     | Typ | Max | Unit |
|------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----|-----|------|
| Permanent power supply (vehicle battery) | $U_{\text{Batt}}$ | Vehicle usage <sup>1)</sup>                                                                                                                                         | 6                       | 12  | 36  | V    |
|                                          |                   |                                                                                                                                                                     | [all values $\pm 0\%$ ] |     |     |      |
| Cranking voltage                         | $U_{\text{Batt}}$ | < 3 seconds                                                                                                                                                         | 3                       |     |     | V    |
| Standby current                          | $I_{\text{STBY}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>ECU off;<br>no load from ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$                                                            | 8                       | 24  | 40  | mA   |
| Operating current                        | $I_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>no load from ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$                                                                        | 175                     | 275 | 375 | mA   |
| Power dissipation                        | $P_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>no load from ECU;<br>$T = 20 \text{ }^{\circ}\text{C}$                                                                        | 2.1                     | 3.3 | 4.5 | W    |
| Power dissipation                        | $P_{\text{Batt}}$ | $U_{\text{Batt}} = 12 \text{ V}$ ;<br>$I = 500 \text{ mA}$ at pin VDDSTBY (1V);<br>$I = 80 \text{ mA}$ at pin VDDPSTBY (3.3V);<br>$T = 20 \text{ }^{\circ}\text{C}$ | 3.1                     | 4.3 | 5.5 | W    |

| Parameter                                                                                                                               | Symbol | Condition | Min                      | Typ | Max | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|--------------------------|-----|-----|------|
| Fuse in the ETK $U_{\text{Batt}}$ supply line.                                                                                          |        |           | MINI, 2 A 58 V DC        |     |     |      |
| Only required if the power supply or ECU is not protected accordingly.                                                                  |        |           | (Littelfuse 0997002.WXN) |     |     |      |
| Overvoltage category<br>(AC mains supply)                                                                                               |        | II        |                          |     |     |      |
| <sup>1)</sup> The M-ETK implements reverse voltage protection in the same range and may be used only with central load dump protection. |        |           |                          |     |     |      |

**Note**

The M-ETK will accept power supply voltage dips (for additional details of 3 V low voltage operation, see ISO standard 16750).

**Maximum Inrush Current**

It is highly recommended that the M-ETK be connected to a permanent power supply. When this is not possible, or the M-ETK must be powered off and back on in short intervals, time is required to reactivate the inrush limiting circuit of the M-ETK.

If the time between powering the ETK off and on is less than 40 seconds a high current peak can occur. If the above-mentioned fuse is used, this inrush current will not trigger the fuse. If other protection mechanisms are in place, the inrush current must be considered in the ECU design.

| Time Between Powering Off and On | Inrush Current Pulse ( $U_{\text{Batt}} = 12 \text{ V}$ ) |
|----------------------------------|-----------------------------------------------------------|
| > 40 s                           | 700 mA / 5 ms                                             |
| < 40 s                           | 18 A / 60 $\mu\text{s}$                                   |



### Power Supply Pin Assignment

| Pin | Signal                                    | Direction | Comment                                                                    |
|-----|-------------------------------------------|-----------|----------------------------------------------------------------------------|
| 1   | VDDPSTBY<br>(3.3 V supply,<br>80mA max.)  | Output    | Permanent power supply of ECU<br>DAP Interface, 3.3 V                      |
| 2   | VDDSTBY<br>(1.00 V supply,<br>500mA max.) | Output    | Permanent power supply of ECU<br>EDRAM                                     |
| 3   | GND                                       | Input     | Power Ground                                                               |
| 4   | CAL_WAKEUP                                | Output    | Switch to $U_{Batt}$ . ECU wake-up signal<br>(for measurement preparation) |
| 5   | Ubatt2                                    | Input     | Vehicle battery                                                            |
| 6   | Ubatt1                                    | Input     | Vehicle battery                                                            |

#### 6.1.6.2 Microcontroller Interface (adapter dependent)

| Parameter                                                       | Symbol             | Condition           | Min                | Typ  | Max        | Unit    |
|-----------------------------------------------------------------|--------------------|---------------------|--------------------|------|------------|---------|
| ECU Standby<br>RAM Output<br>Voltage                            | VDDSTBY            | max 500 mA<br>load  | 1.27               | 1.32 | 1.36       | V       |
| VDDPSTBY<br>Output Voltage                                      | VDDPSTBY           | max 80 mA<br>load   | 3.14               | 3.3  | 3.46       | V       |
| Cal_Wakeup<br>Output Voltage                                    | CAL_<br>WAKEUP     | load = 0 - 50<br>mA | $U_{Batt}$ -<br>1V |      | $U_{Batt}$ | V       |
| ECU Power Sup-<br>ply Supervision<br>Voltage<br>(3.3V selected) | VDDP<br>(Sense)    | ECU on              | 2.67               | 2.77 | 2.89       | V       |
|                                                                 |                    | ECU off             | 2.44               | 2.56 | 2.89       | V       |
|                                                                 |                    | abs. max.           |                    |      | 5.50       |         |
|                                                                 | IDDP               | VDDP 3.3 V          |                    |      | 800        | $\mu$ A |
| ECU Standby<br>RAM Supervision<br>Voltage                       | VDDSTBY            | VDDSTBY             | 1.04               | 1.07 | 1.1        | V       |
|                                                                 | /VDDSTBY_<br>SENSE | VDDSTBY ↓           | 1.03               | 1.06 | 1.09       | V       |
|                                                                 | IDDSTBY            | VDDSTBY 1.3 V       |                    |      | 50         | $\mu$ A |

### 6.1.6.3 Test Characteristics

| Parameter                     | Symbol                | Condition                                                            | Min | Typ | Max | Unit |
|-------------------------------|-----------------------|----------------------------------------------------------------------|-----|-----|-----|------|
| Start-up Time 1 <sup>1)</sup> | t <sub>startup1</sub> | U <sub>Batt</sub> = 12 V<br>Standby configured<br>ECU_VDDP goes high | 0   | 5   | 10  | ms   |
| Start-up Time 2 <sup>1)</sup> | t <sub>startup2</sub> | U <sub>Batt</sub> = 0 V 12 V<br>transfer<br>BOO FPGA+SoC             | 10  | 20  | 50  | ms   |

<sup>1)</sup> PORESET is not pulled low during M-ETK start up time.

### 6.1.6.4 SWD Timing Characteristics

The M-ETK supports the 2-pin SWD mode: one data pin (direction via protocol), one clock pin.

| Parameter                  | Symbol | Value<br>SR6X7[ns] | Value<br>SR6P7 [ns] | Comment        |
|----------------------------|--------|--------------------|---------------------|----------------|
| SWCLK Clock Period (typ.)  | tCLK   | 14.3 <sup>1)</sup> | 8.0 <sup>2)</sup>   | ETK --> Target |
| SWDIO Set-Up Time          | tSU    | 4.0                | 2.3                 | ETK --> Target |
| SWDIO Hold Time            | tH     | 1.5                | 2.3                 | ETK --> Target |
| SWDIO Clock-to-Out Time    | tCO    | 12.4               | 11.5                | Target --> ETK |
| SWDIO Output Hold Time     | tOH    | 4.3                | 3                   | Target --> ETK |
| SWDIO data unstable window |        |                    | 3                   |                |

<sup>1)</sup> : @ 70 MHz SWD Clock Frequency

<sup>2)</sup> : @ 125 MHz SWD Clock Frequency

### 6.1.6.5 Aurora Trace Timing Parameter

| Parameter                   | Value | Unit   | Signal Impedance [Ohm] |
|-----------------------------|-------|--------|------------------------|
| Clock                       | 100   | MHz    | 100 (differential)     |
| Data rate DATA[3...0] (max) | 3.125 | Gbit/s | 100 (differential)     |

### 6.1.6.6 Electrical Characteristics

#### ECU Interface Connector SWD / JTAG Interface

| Signal              | Pin Type           | V <sub>OL</sub><br>(max)<br>[V] | V <sub>OH</sub><br>(min)<br>[V] | V <sub>OH</sub><br>(max)<br>[V] | V <sub>IL</sub><br>(max)<br>[V] | V <sub>IH</sub><br>(min)<br>[V] | V <sub>IH</sub><br>(max)<br>[V] | Leak-<br>age<br>cur-<br>rent<br>(min) /<br>(max)<br>[μA] | Addi-<br>tional<br>load by<br>ETK <sup>1)</sup><br>(typ)<br>[pF] |
|---------------------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------------------------------|------------------------------------------------------------------|
| DAP0<br>(TCK)       | XO <sup>1)</sup>   | 0.4                             | 2.8                             | 3.3                             | -                               | -                               | 5.5                             | +705 /<br>+495                                           | 36                                                               |
| DAP1<br>(TMS)       | IXO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | -3310 /<br>-2390                                         | 36                                                               |
| DAP2<br>(TDO)       | IXO <sup>1)</sup>  | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | -3310 /<br>-2390                                         | 36                                                               |
| RESERVE-<br>D (TDI) | XO <sup>1)</sup>   | 0.4                             | 2.8                             | 3.3                             | 0.8                             | 2                               | 5.5                             | +10 / -<br>10                                            | 36                                                               |
| /TRST               | XO <sup>2)</sup>   | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 6.5                             | -705 / -<br>569                                          | 22                                                               |
| /RESETO-<br>UT      | IXOD <sup>3)</sup> | 0.7                             | -                               | -                               | 0.8                             | 2                               | 6.5                             | +21 / -<br>20                                            | 21                                                               |
| /PORESE-<br>T       | IXOD <sup>3)</sup> | 0.7                             | -                               | -                               | 0.8                             | 2                               | 6.5                             | +21 / -<br>20                                            | 21                                                               |
| WDGDIS<br>)         | XO <sup>2)</sup>   | 0.6                             | 2.4                             | 3.3                             | -                               | -                               | 6.5                             | +10 / -<br>10                                            | 21                                                               |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 16mA

<sup>2)</sup> max 24 mA

<sup>3)</sup> max 0.2 A

### ECU Interface Connector Pin Assignment

| Pin | DAP Mode     | Direction | Comment                                                                    |
|-----|--------------|-----------|----------------------------------------------------------------------------|
| 1   | GND          | Power     | Signal Ground                                                              |
| 2   | DAP0         | Output    | DAP signal                                                                 |
| 3   | /TRST        | Output    | DAP signal                                                                 |
| 4   | DAP2         | Bidir     | DAP signal                                                                 |
| 5   | DAP1         | Bidir     | DAP signal                                                                 |
| 6   | TDI          | Bidir     | Reserved                                                                   |
| 7   | WDGDIS       | Output    | Watchdog disable Signal                                                    |
| 8   | VDDP (Sense) | Input     | Sense for Switched power supply of ECU (ignition)                          |
| 9   | /ESR0        | Bidir     | ECU Reset signal (open drain) for Reset assertion and supervision          |
| 10  | /PORESET     | Bidir     | ECU Power On Reset signal (open drain) for Reset assertion and supervision |

### ECU Interface Connector Aurora Trace

| Signal       | Pin Type | V <sub>ID</sub> (min)<br>[mV] | V <sub>ID</sub> (max)<br>[mV] | V <sub>OD</sub> (max)<br>[mV] |
|--------------|----------|-------------------------------|-------------------------------|-------------------------------|
| Clock-P/-N   | XO       | -                             | -                             | 490                           |
| DATA[0]-P/-N | I        | 140                           | 1250                          | -                             |

Pin type:

I: Input, X: Tristate, O: Output, OD: Open Drain

| Signal           | Pin Type         | $V_{OL}$<br>(max)<br>[V] | $V_{OH}$<br>(min)<br>[V] | $V_{OH}$<br>(max)<br>[V] | $V_{IL}$<br>(max)<br>[V] | $V_{IH}$<br>(min)<br>[V] | $V_{IH}$<br>(max)<br>[V] | Leakage current<br>(min / max)<br>[ $\mu$ A] | Additional load by ETK <sup>1)</sup><br>(typ)<br>[pF] |
|------------------|------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------------------------|-------------------------------------------------------|
| AUR_<br>RESERVED | XO <sup>1)</sup> | 0.6                      | 2.4                      | 3.3                      | -                        | -                        | 6.5                      | +159 / +99                                   | 24                                                    |

Pin Type:

I: Input, X: Tristate, O: Output, OD: Open Drain

<sup>1)</sup> max 24 mA

### ECU Interface Connector Aurora Trace Pin Assignment

| Pin | Signal  | Direction | Comment            |
|-----|---------|-----------|--------------------|
| 1   | GND     | -         | Signal Ground      |
| 2   | GND     | -         | Signal Ground      |
| 3   | Data1-N | Input     | do not use         |
| 4   | Data0-P | Input     | Aurora Data Lane 0 |
| 5   | Data1-P | Input     | do not use         |
| 6   | Data0-N | Input     | do not use         |
| 7   | GND     | -         | Signal Ground      |
| 8   | GND     | -         | Signal Ground      |
| 9   | Data2-P | Input     | do not use         |
| 10  | GND     | -         | Signal Ground      |
| 11  | Data2-N | Input     | do not use         |
| 12  | Clock-N | Output    | Aurora Clock       |
| 13  | GND     | -         | Signal Ground      |
| 14  | Clock-P | Output    | Aurora Clock       |
| 15  | Data3-N | Input     | do not use         |
| 16  | GND     | -         | Signal Ground      |
| 17  | Data3-P | Input     | do not use         |

| Pin | Signal    | Direction | Comment          |
|-----|-----------|-----------|------------------|
| 18  | -         | -         | not connected    |
| 19  | GND       | -         | Signal Ground    |
| 20  | CRC-Error | Output    | Aurora CRC error |

## 6.2 Interface specifications

### 6.2.1 Automotive Ethernet Interface

| Item               | Characteristics                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Connection         | Automotive Ethernet 1000 Base-T1                                                                                                              |
| Protocol           | XCP on TCP/IP or UDP/IP                                                                                                                       |
| IP address         | Dynamic (standard, for INCA) or Static (e.g. for Rapid Prototyping) by using the M-ETK Configuration Tool (default IP address: 192.168.40.14) |
| Cable length       | max. 8 m                                                                                                                                      |
| Ethernet Interface | DC decoupling<br>Max. Isolation Voltage 60 V DC, according IEC 61010-1 ("Limit values for accessible parts" in normal, dry condition)         |



#### Note

The Automotive Ethernet interface is not compatible with the standard Ethernet interface of ETAS modules. A 1000 Base-T1 Automotive Ethernet Media Converter is needed to connect the M-ETK + M-ETK-AB1.0 / M-ETK-AB2.0 to the PC.

### 6.3 Product markings

| Symbol                                                                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Please read the user manual before starting up the product.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| SN: xxxxxxxx                                                                        | Serial number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| F 00K<br>xxxxxxx                                                                    | Order number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| x-xx V<br>— — —                                                                     | Operating voltage range DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| xxx mA                                                                              | Max. current consumption                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|    | <b>China RoHS</b><br>With the China RoHS identification attached to the product or its packaging, ETAS confirms that the product meets the guidelines of the “China RoHS” (Management Methods for Controlling Pollution Caused by Electronic Information Products Regulation) applicable in the People’s Republic of China.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|  | <b>CE Conformity</b><br>With the CE mark attached to the product or its packaging, ETAS confirms that the product corresponds to the applicable, product-specific Directives of the European Union.<br>The CE Declaration of Conformity for the product is available upon request.<br><b>European Union</b><br>The EU Directive 2011/65/EU limits the use of certain dangerous materials for electric and electronic devices (RoHS conformity). This product does not contain any of the prohibited substances listed in EU Directive 2011/65/EU and does not exceed the maximum authorized concentrations specified. There are currently no equivalent alternative substances for individual electronic components used in our products. We are therefore making use of exemptions 7.a (for accessory, cables and hardware) in Annex III of this Directive. ETAS confirms that the product meets this directive applicable in the European Union. |

| Symbol                                                                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <p><b>UKCA Conformity</b></p> <p>With the UKCA mark attached to the product or its packaging, ETAS confirms that the product meets the applicable, product-specific British standards and directives.</p> <p>The UKCA Declaration of Conformity for the product is available upon request.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|    | <p><b>KCC Conformity</b></p> <p>With the KC mark attached to the product or its packaging, ETAS confirms that the product has been registered in accordance with the applicable, product-specific KCC guidelines of the Republic of Korea.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|    | <p><b>CMIM conformity</b></p> <p>With the CMIM mark attached to the product or its packaging, ETAS confirms that the product corresponds to the product-specific, applicable directives of the Kingdom of Morocco.</p> <p>The CMIM Declaration of Conformity for the product is available upon request.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | <p><b>Product Return and Recycling</b></p> <p>The European Union (EU) released the Directive for Waste Electrical and Electronic Equipment - WEEE to ensure the setup of systems for collecting, treating and recycling electronic waste in all countries of the EU.</p> <p>This ensures that the devices are recycled in a resource-friendly way that does not represent any risk to personal health and the environment.</p> <p>The WEEE symbol (see Fig.4-2) on the product or its packaging identifies that the product may not be disposed of together with the remaining trash.</p> <p>The user is obligated to separately collect old devices and provide them to the WEEE return system for recycling.</p> <p>The WEEE Directive applies to all ETAS devices, but not to external cables or batteries.</p> <p>Additional information about the recycling program of ETAS GmbH is available from the ETAS sales and service locations.</p> |



## **7 Maintenance**

### **7.1 Cleaning**

- Only clean the product when it is de-energized.
- Do not use cleaning agents that could harm the product.
- Do not apply cleaning agents directly onto the product.
- Make sure that no moisture enters the product.
- Carefully vacuum off dust particles and loose foreign bodies.

### **7.2 Repair service**

If repairs are required, send the product to ETAS.

## 8 Return form

You can find the return form and information about this process on the ETAS website: [www.etas.com/en/support/hw\\_return\\_form.php](http://www.etas.com/en/support/hw_return_form.php).


## 9 Accessories and order information

### 9.1 Ordering Information M-ETK

| Order Name                                                       | Short Name      | Order Number  |
|------------------------------------------------------------------|-----------------|---------------|
| <b>Preconfigured M-ETK-T1.0</b>                                  | M-ETK-T-ST-01B  | F 00K 118 554 |
| <b>Package Contents</b>                                          |                 |               |
| M-ETK-T1.0,<br>M-ETK_Base_MCU_ST_01, M-ETK_<br>Feature_Trace2PIN |                 |               |
| <b>Preconfigured M-ETK-T1.0</b>                                  | M-ETK-T-ST-01A  | F 00K 118 555 |
| <b>Package Contents</b>                                          |                 |               |
| M-ETK-T1.0,<br>M-ETK_Base_MCU_IFX_01                             |                 |               |
| <b>Preconfigured M-ETK-T1.0</b>                                  | M-ETK-T-IFX-01B | F 00K 118 768 |
| <b>Package Contents</b>                                          |                 |               |
| M-ETK-T1.0,<br>M-ETK_Base_MCU_ST_01, M-ETK_<br>Feature_Trace2PIN |                 |               |

## 9.2 Ordering Information M-ETK AB

### 9.2.1 M-ETK-AB1.0

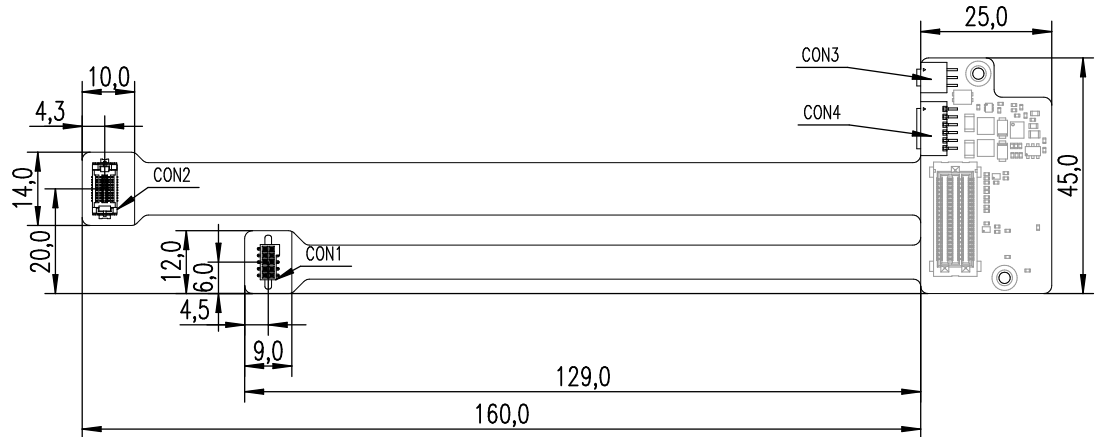

#### 9.2.1.1 Order Information

| Order Name                                                                                           | Short Name   | Order Number  |
|------------------------------------------------------------------------------------------------------|--------------|---------------|
| Adapter Board for M-ETK-T. Host Interface:<br>AE 1000Base-T1, ECU Interface: 1xJTAG/SWD,<br>1xAurora | M-ETK-AB1.0A | F 00K 117 316 |
| Adapter Board for M-ETK-T. Host Interface:<br>AE 1000Base-T1, ECU Interface: 1xDAP, 1xAurora         | M-ETK-AB1.0B | F 00K 118 585 |

#### 9.2.1.2 Compatible Cables Power Supply

| Order Name                                                                                             | Order Number  |
|--------------------------------------------------------------------------------------------------------|---------------|
| ETAM2                                                                                                  | F 00K 109 306 |
| ETAM5 M-ETK/F-ETK ECU Adapter, MOLEX - MOLEX (6fc - 5fc+1c), 0m136                                     | F 00K 110 101 |
| ETAM9 F/XETK-S ECU Adapter, MOLEX -MOLEX (6fc - 5fc), 0m136                                            | F 00K 111 043 |
| ETAM10 F / X-ETK-S ECU Adapter, MOLEX - MOLEX (6fc - 6fc), 0m07                                        | F 00K 111 814 |
| MOLEX - MOLEX (6fc - 6fc) adapter cable ETAM12 (0,1 m / 0,33 ft) for connecting an F-/X-ETK to the ECU | F 00K 112 457 |
| ETV5                                                                                                   | F 00K 111 701 |


For detailed information about the cables, see the chapter "[Cables, Adapters and Accessories](#)" on page 81

### 9.2.1.3 Compatible Cables Ethernet connection

| Order Name                    | Order Number  |
|-------------------------------|---------------|
| CBAM435 (Automotive Ethernet) | F 00K 117 318 |
| CBEB130.1-3 <sup>1)</sup>     | F 00K 117 319 |
| CBEB130.1-8 <sup>2)</sup>     | F 00K 117 320 |

For detailed information about the cables, see the chapter "[Cables, Adapters and Accessories](#)" on page 81

### 9.2.2 M-ETK-AB2.0

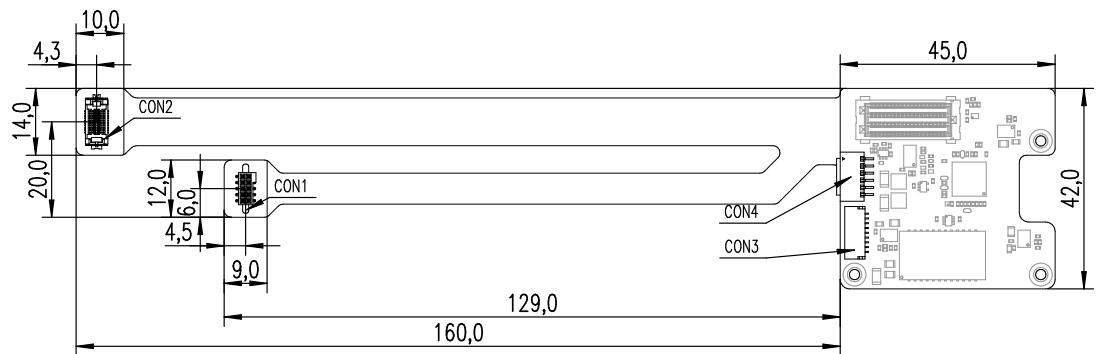

#### 9.2.2.1 Order Information

| Order Name                                                                                     | Short Name   | Order Number  |
|------------------------------------------------------------------------------------------------|--------------|---------------|
| Adapter Board for M-ETK-T. Host Interface: AE 1000Base-T1, ECU Interface: 1xJTAG/SWD, 1xAurora | M-ETK-AB2.0A | F 00K 118 241 |
| Adapter Board for M-ETK-T. Host Interface: ETH 1000Base-T. ECU Interface: 1xDAP, 1xAurora      | M-ETK-AB2.0B | F 00K 118 400 |

- 1) For the connection between CBAM435 to the ES160.
- 2) For the connection between CBAM435 to the ES160.

### 9.2.2.2 Compatible Cables Power supply

| Order Name                                                                                             | Order Number  |
|--------------------------------------------------------------------------------------------------------|---------------|
| ETAM2                                                                                                  | F 00K 109 306 |
| ETAM5 M-ETK/F-ETK ECU Adapter, MOLEX - MOLEX (6fc - 5fc+1c), 0m136                                     | F 00K 110 101 |
| ETAM9 F/XETK-S ECU Adapter, MOLEX -MOLEX (6fc - 5fc), 0m136                                            | F 00K 111 043 |
| ETAM10 F / X-ETK-S ECU Adapter, MOLEX - MOLEX (6fc - 6fc), 0m07                                        | F 00K 111 814 |
| MOLEX - MOLEX (6fc - 6fc) adapter cable ETAM12 (0,1 m / 0,33 ft) for connecting an F-/X-ETK to the ECU | F 00K 112 457 |
| ETV5                                                                                                   | F 00K 111 701 |

For detailed information about the cables, see the chapter ["Cables, Adapters and Accessories"](#) on the next page

### 9.2.2.3 Compatible Cables Ethernet connection

| Order Name               | Order Number  |
|--------------------------|---------------|
| CBAM300.3-0m6            | F 00K 112 469 |
| CBAM305.1-0m6            | F 00K 109 297 |
| CBAM305.1-2m2            | F 00K 112 338 |
| CBAM320.1-0m6            | F 00K 109 299 |
| CBAM340.1-0m6            | F 00K 109 302 |
| CBAM350.1-0m17           | F 00K 111 439 |
| CBE260.1-3 <sup>1)</sup> | F 00K 109 446 |
| CBE260.1-5 <sup>2)</sup> | F 00K 111 001 |
| CBE260.1-8 <sup>3)</sup> | F 00K 109 447 |
| CBE250.1-3 <sup>4)</sup> | F 00K 109 469 |
| CBE250.1-5 <sup>5)</sup> | F 00K 109 470 |
| CBE250.1-8 <sup>6)</sup> | F 00K 109 471 |

## 9.3 Cables, Adapters and Accessories

### 9.3.1 Overview and Classification

This chapter contains information about the following cables and accessory.



#### Note

See "[Mounting and placement](#)" on page 18 for details on wiring the ECU interface adapters.

- 1) To connect the CBAM3xx to the ES89x
- 2) To connect the CBAM3xx to the ES89x
- 3) To connect the CBAM3xx to the ES89x
- 4) To connect the CBAM3xx to the Gigabit Ethernet, connection to PC
- 5) To connect the CBAM3xx to the Gigabit Ethernet, connection to PC
- 6) To connect the CBAM3xx to the Gigabit Ethernet, connection to PC

9.3.2 Cables and Adapter Requirements for fail safe Operation



Note

We recommend to use ETAS cables or any other cables certified by the standards for the application. Adhere to the maximum permissible cable lengths!




Note

Application-specific cables are available from ETAS. Please contact your ETAS contact partner or e-mail [sales.de@etas.com](mailto:sales.de@etas.com).

Please contact your local ETAS representative for further cable information.

9.3.3 CBAM300 Cable

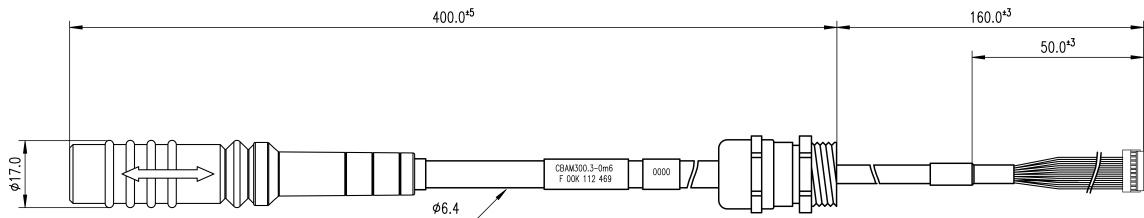


Usage

The FETK ECU interface cable CBAM300.3 (reused by FETK) is pre-assembled into PG9 screwing, with a connected shield on screwing:

- For thin walled housings, use a through boring with 15.2 mm in the housing and mount the cable with a nut (not included) (SM-PE 9 order number 52103210 from Lapp).
- For wall thickness more than 4 mm cut a thread into the housing.

Connectors

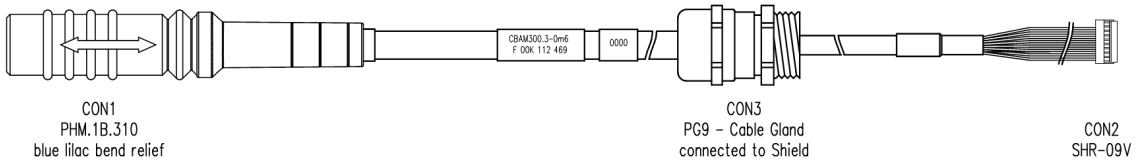

| Connector | Color       | Target                           |
|-----------|-------------|----------------------------------|
| CON1      | Blue purple | GBit Ethernet cable, e.g. CBE260 |
| CON2      | White       | FETK                             |
| CON3      | -           | Shield ECU housing               |



### Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +125 °C |

### Tightness

| Condition    | IP Code |
|--------------|---------|
| PG9 screwing | IP67    |

### Order Information

| Product       | Length | Order Number  |
|---------------|--------|---------------|
| CBAM300.3-0m6 | 0.6 m  | F 00K 112 469 |

#### 9.3.4 CBAM305 Cable

The CBAM305.1 FETK cable (reused by FETK) is a 1 GBit/s Ethernet cable adapter with external power supply for FETKs.

Pre-assembled into PG9 screwing, shield connected to the screwing. It is usable for ECUs without permanent power supply inside. Depending on the version, there is a power plug on the ECU side or an open cable end on the power cable:

- For thin walled housings, use a through boring with 15.2 mm in the housing and mount the cable with a nut (not included) (SM-PE 9 Order number 52103210 from Lapp).
- For wall thickness more than 4mm cut a thread into the housing.

If the CBAM305.1-2m2 is used, a 2 pin Erni connector (214011 or compatible) must be available on the ECU as counterpart for the UBatt connector.



#### Note

It is recommended for safety reasons to connect the external permanent voltage and the switched voltage inside the ECU!




#### Note


For mounting the cable, cut a PG9 thread into the ECU housing. For thin walled housings use a nut SM-PE 9. It is available from Lapp (order number: 52103210).

Mechanical Dimensions

CBAM305.1-0m6 Cable

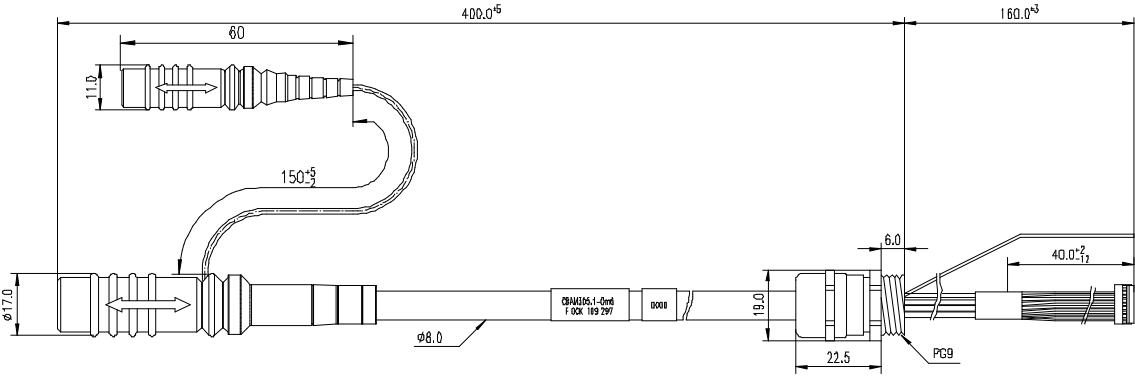


CBAM305.1-2m2 Cable

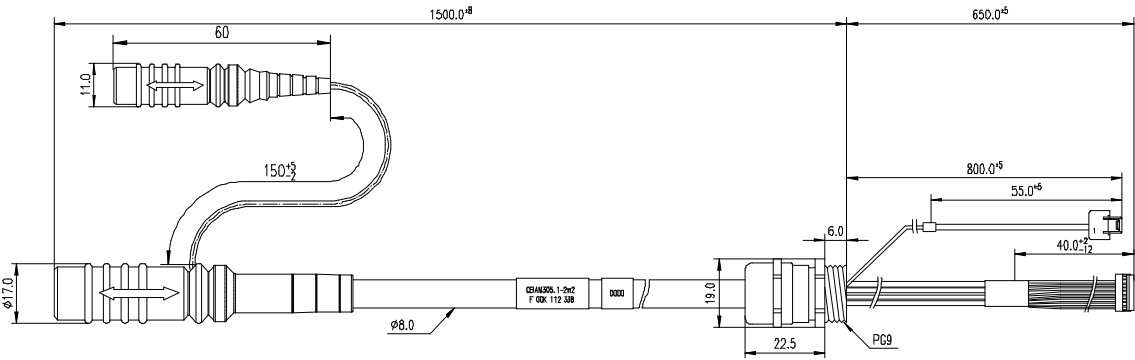


Connectors

CBAM305.1-0m6 Cable

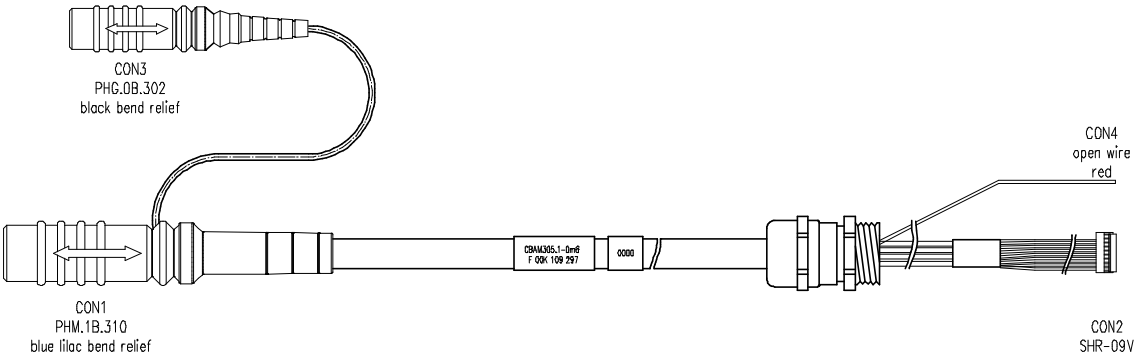

| Connector | Color       | Target                              |
|-----------|-------------|-------------------------------------|
| CON1      | Blue purple | GBit Ethernet cable, e.g. CBE260    |
| CON2      | White       | FETK                                |
| CON3      | Black       | Permanent power supply, K70.1 cable |
| CON4      | Red         | FETK UBATT                          |

CBAM305.1-2m2 Cable

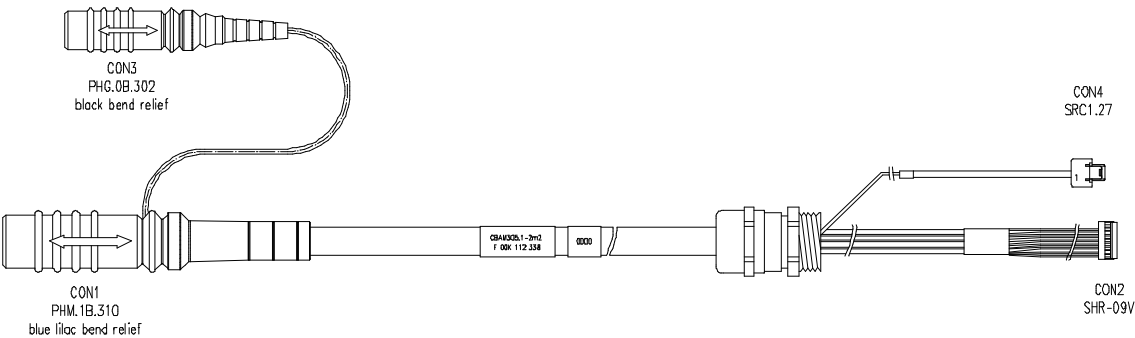

| Connector | Color       | Target                              |
|-----------|-------------|-------------------------------------|
| CON1      | Blue purple | GBit Ethernet cable, e.g. CBE260    |
| CON2      | White       | FETK                                |
| CON3      | Black       | Permanent power supply, K70.1 cable |
| CON4      | Red         | 2 pin ERNI power ECU connector      |

Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +125 °C |


Tightness

| Condition    | IP Code |
|--------------|---------|
| PG9 screwing | IP67    |

Order Information

| Product       | Length | Order Number  |
|---------------|--------|---------------|
| CBAM305.1-0m6 | 0.6 m  | F 00K 109 297 |
| CBAM305.1-2m2 | 2.2 m  | F 00K 112 338 |

9.3.5 CBAM320 Cable

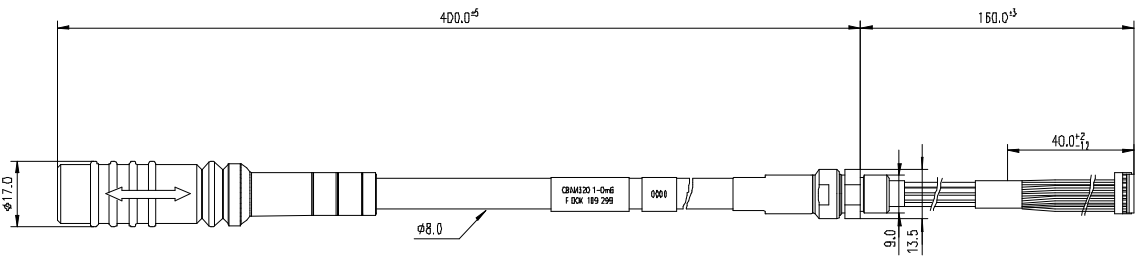


Usage

The CBAM320.1-0m60 ETK interface cable (reused by FETK) is a 1 GBit/s cable adapter for FETKs. It is pre-assembled into M9 screwing, shield connected to the screwing:

- For wall thickness less than 4 mm, it is possible to use a through boring with 9.2 mm in the housing and mount the cable with a nut (included).
- For wall thickness more than 4 mm cut a thread into the housing. A special Lemo thread cutter M9 x 0.6 (Order Number: DTA.99.900.6Z) is necessary.

Connectors

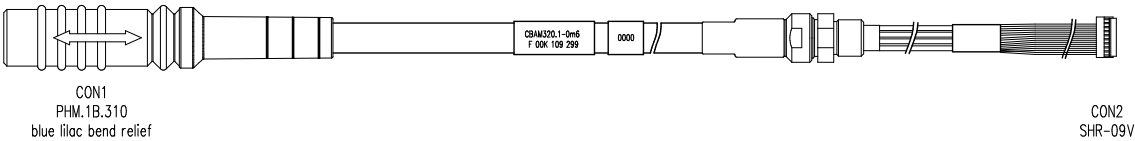

| Connector | Color       | Target                           |
|-----------|-------------|----------------------------------|
| CON1      | Blue purple | GBit Ethernet cable, e.g. CBE260 |
| CON2      | White       | FETK                             |

Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +125 °C |


Tightness

| Condition    | IP Code |
|--------------|---------|
| PG9 screwing | IP67    |

Order Information

| Product       | Length | Order Number  |
|---------------|--------|---------------|
| CBAM320.1-0m6 | 0.6 m  | F 00K 109 299 |

9.3.6 CBAM340 Cable

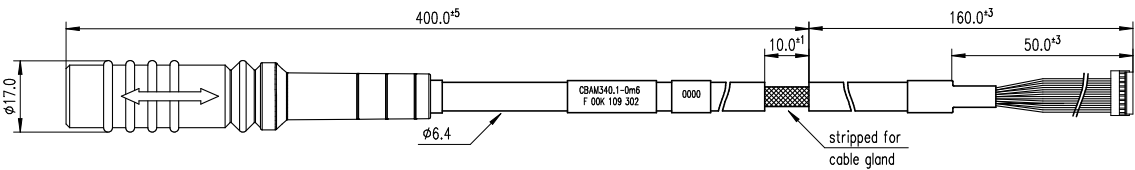

Usage


The FETK interface cable CBAM340.1 (reused by FETK) is stripped for 10 mm, to mount the cable with a EMC safe cable gland into the ECU housing.

FETK ECU Adapter Cable, shield on ECU-Housing

**Note**

The hardware for mounting ECU adapter cables is not included in the cable delivery, they need to be ordered separately. For detailed information on mounting accessories contact ETAS technical support.

Connectors

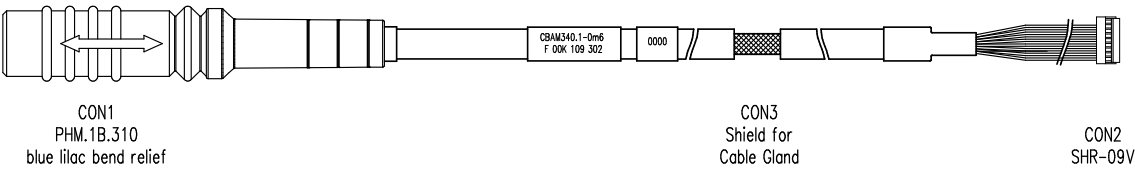

| Connector | Color       | Target                           |
|-----------|-------------|----------------------------------|
| CON1      | Blue purple | GBit Ethernet cable, e.g. CBE260 |
| CON2      | White       | FETK                             |
| CON3      | -           | Shield to ECU housing            |


Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +125 °C |

Order Information

| Product       | Length | Order Number  |
|---------------|--------|---------------|
| CBAM340.1-0m6 | 0.6 m  | F 00K 109 302 |


9.3.7 CBAM350 Cable

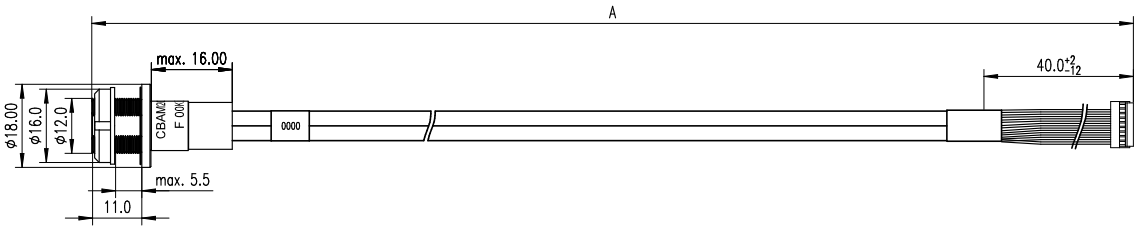

Usage

The CBAM350.1-0 FETK interface cable (reused by FETK) is a 1 GBit/s cable adapter with a water tight socket. The cable shield is connected to socket. It is usable for ECUs with shielded housing.

Panel Cut-Out



Assembling



A Lemo tool, type “Lemo Spanner DCH.91.161.PA” is needed for assembling the connector (not included in the delivery).

**Note**

The Lemo Spanner DCH.91.161.PA is not included in the cable delivery, It need to be ordered separately. For detailed information on mounting accessories contact ETAS technical support.


Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +125 °C |

Order Information

| Product        | Length | Order Number  |
|----------------|--------|---------------|
| CBAM350.1-0m17 | 0.17 m | F 00K 111 439 |

9.3.8 CBAM435 (Automotive Ethernet)

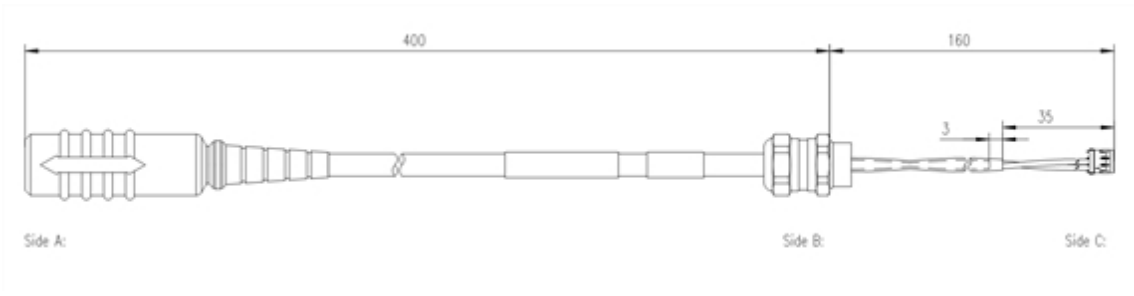

9.3.8.1 Usage

 **Note**




It is recommended for safety reasons to connect the external permanent voltage and the switched voltage inside the ECU!

9.3.8.2 Mechanical Dimensions

For thin walled housings, use a through boring with 10.2 mm in the housing and mount the cable with a nut (not included) (Ordernumber 8000.10.1 from AGRO).  
For wall thickness more than 2.5 mm cut a thread into the housing.

9.3.8.3 Connectors and Positions

| LEMO-Socket | AGRO Cable Gland          | Molex Pico-SPOX                      |
|-------------|---------------------------|--------------------------------------|
|             | Messing<br>1080.12.91.075 | Receptacle<br>housing:<br>87439-0300 |



View to solder side

| Side A                      | Side D          |
|-----------------------------|-----------------|
| <b>Pin:</b><br><b>Label</b> |                 |
| Housing: Shield             | Housing: Shield |
| 1: BR+                      |                 |
| 6: BR-                      |                 |

9.3.8.4 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |



### 9.3.8.5 Order Information

| Order Name                                                                                                           | Short Name    | Length [m] | Order Number  |
|----------------------------------------------------------------------------------------------------------------------|---------------|------------|---------------|
| M-ETK ECU Adapter Cable, pre-assembled into M10 screwing, shield on ECU-Housing, Lemo 1B PHI - MOLEX (7fc-3fc), 0m60 | CBAM435.1-0m6 | 0.6        | F 00K 117 318 |

### 9.3.9 CBE250 (Cable for the HOST Interface)




Gigabit Ethernet cable, connection to PC

#### Order Information

| Order Name                                                                | Short Name | Length [m] | Order Number  |
|---------------------------------------------------------------------------|------------|------------|---------------|
| Ethernet PC Connection Cable 1 Gbit/s, Lemo 1B FGM – RJ45 (10fc-8mc), 3 m | CBE250.1-3 | 3          | F 00K 109 469 |
| Ethernet PC Connection Cable 1 Gbit/s, Lemo 1B FGM – RJ45 (10fc-8mc), 5 m | CBE250.1-5 | 5          | F 00K 109 470 |
| Ethernet PC Connection Cable 1 Gbit/s, Lemo 1B FGM – RJ45 (10fc-8mc), 8 m | CBE250.1-8 | 8          | F 00K 109 471 |

### 9.3.10 CBE260 Cable




#### Usage

Gigabit Ethernet and Power Connection cable for FETK (reused by FETK). Lemo connectors on both sides compliant to IP65. 3 m length.

The CBAE260 cable is a Gigabit Ethernet cable to connect an ETAS ES device with an FETK or another ES device. The cable supports power propagation.

Connectors

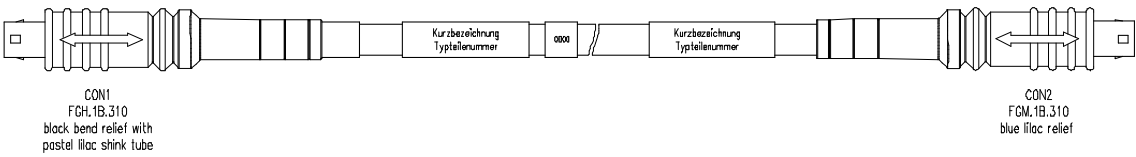

| Connector | Color         | Target             |
|-----------|---------------|--------------------|
| CON1      | Pastel purple | ES8xx Downlink     |
| CON2      | Blue purple   | ES8xx Uplink, FETK |


Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +120 °C |

Order Information

| Product    | Length | Order Number  |
|------------|--------|---------------|
| CBE260.1-3 | 3 m    | F 00K 109 446 |
| CBE260.1-5 | 5 m    | F 00K 111 001 |
| CBE260.1-8 | 8 m    | F 00K 109 447 |

9.3.11 CBEB130 (Automotive Ethernet)

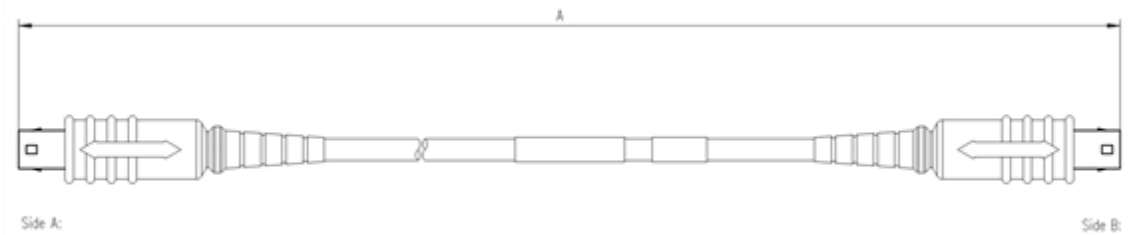

9.3.11.1 Usage



Note



It is recommended for safety reasons to connect the external permanent voltage and the switched voltage inside the ECU!

9.3.11.2 Mechanical Dimensions

For thin walled housings, use a through boring with 12.2 mm in the housing and mount the cable with a nut (not included) (Ordernumber 8000.12 from AGRO).

For wall thickness more than 2.5mm cut a thread into the housing.

9.3.11.3 Connectors and Positions

| LEMO-Socket                                                                       | LEMO-Socket                                                                        |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                                                                                   | LEMO FGI.1B.512.CTA                                                                |
|  |  |
| View to solder side                                                               | View to solder side                                                                |
| Side A                                                                            | Side B                                                                             |
| Pin: Label                                                                        | Pin: Label                                                                         |
| Housing: Shield                                                                   |                                                                                    |
| 1: BR+                                                                            | 1: BR+                                                                             |
| 6: BR-                                                                            | 6: BR-                                                                             |


9.3.11.4 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

9.3.11.5 Order Information

| Order Name                                                                               | Short Name  | Length [m] | Order Number  |
|------------------------------------------------------------------------------------------|-------------|------------|---------------|
| 1000Base-T1 Automotive Ethernet Cable for M-ETK, Lemo 1B PHI - Lemo 1B FGI (7mc-7mc), 3m | CBEB130.1-3 | 3          | F 00K 117 319 |
| 1000Base-T1 Automotive Ethernet Cable for M-ETK, Lemo 1B PHI - Lemo 1B FGI (7mc-7mc), 8m | CBEB130.1-8 | 8          | F 00K 117 320 |

9.3.12 ETAM2 Adapter

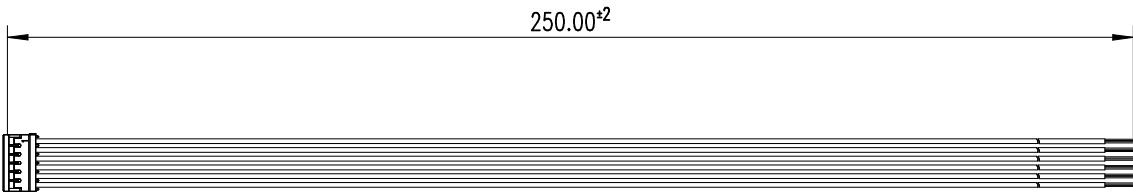

9.3.12.1 Pin Assignment ETAM2 Connector



| Pin | Color  | Signal     | Description                                                                    |
|-----|--------|------------|--------------------------------------------------------------------------------|
| 1   | Blue   | VDDPSTBY   | Permanent power supply of ECU interface (Supply)                               |
| 2   | Yellow | VDDSTBY    | Permanent power supply of ECU ED RAM (Supply)                                  |
| 3   | Brown  | Ground     | Power ground                                                                   |
| 4   | Green  | Cal_Wakeup | Switch to U <sub>Batt</sub> . ECU wake-up signal (for measurement preparation) |
| 5   | Red    | SGUBATT2   | Vehicle battery                                                                |
| 6   | Red    | SGUBATT1   | Vehicle battery                                                                |


9.3.12.2 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

9.3.12.3 Ordering Information

| Order Name | Lenght | Order Number  |
|------------|--------|---------------|
| ETAM2      | 0.25m  | F 00K 109 306 |


9.3.13 ETAM5 ECU Adapter (Power)



9.3.13.1 Usage

The ETAM5 adapts the X-ETK power signals (Molex 6 pin connector) to an ECU with a 5 pin Molex Pico Spox connector. The ECU connector is available as Vertical SMT Header [87437-0543] or Right Angle SMT Header [87438-0543]. The red open wire cable is an additional F-ETK U<sub>Batt</sub> input. This wire can connect to an CBAM435 cable with U<sub>Batt</sub> input or to a K50 U<sub>Batt</sub> adapter.

### 9.3.13.2 Mechanical Dimensions

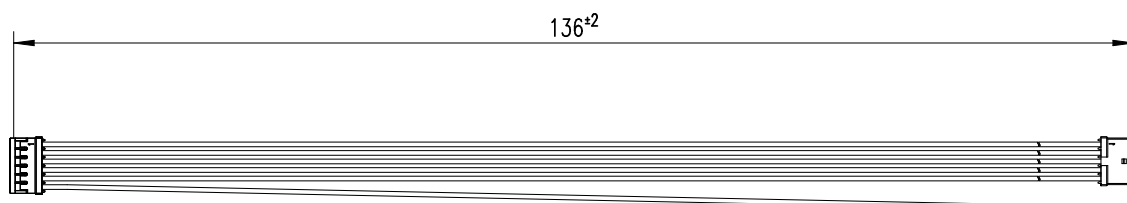

### 9.3.13.3 Connectors and Positions

| Molex Housing                                                                      | Wire    | 5 mm stripped and signed | Molex Housing                                                                        |
|------------------------------------------------------------------------------------|---------|--------------------------|--------------------------------------------------------------------------------------|
| 87439-0600                                                                         | PTFE-5Y |                          | 87439-0500                                                                           |
| <b>Molex Terminal</b>                                                              |         |                          |                                                                                      |
| 87421-0000                                                                         |         |                          |                                                                                      |
| Side A                                                                             | Side B  |                          | Side C                                                                               |
|  |         |                          |  |
| 1                                                                                  | Blue    |                          | 1                                                                                    |
| 2                                                                                  | Yellow  |                          | 2                                                                                    |
| 3                                                                                  | Brown   |                          | 3                                                                                    |
| 4                                                                                  | Green   |                          | 4                                                                                    |
| 5                                                                                  | Red     |                          | 5                                                                                    |
| 6                                                                                  | Red     | Open wire                |                                                                                      |

### 9.3.13.4 ECU Signals

| Pin | Color  | Signal               | Description                                                                    |
|-----|--------|----------------------|--------------------------------------------------------------------------------|
| 1   | Blue   | VDDPSTBY<br>(Supply) | Permanent power supply of ECU interface                                        |
| 2   | Yellow | VDDSTBY<br>(Supply)  | Permanent power supply of ECU ED RAM                                           |
| 3   | Brown  | Ground               | Power ground                                                                   |
| 4   | Green  | Cal_Wakeup           | Switch to U <sub>Batt</sub> . ECU wake-up signal (for measurement preparation) |
| 5   | Red    | SGUBATT1             | Vehicle battery                                                                |


### 9.3.13.5 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

### 9.3.13.6 Ordering Information

| Order Name                                                            | Short Name | Order Number  |
|-----------------------------------------------------------------------|------------|---------------|
| ETAM5 M-ETK/F-ETK ECU Adapter,<br>MOLEX - MOLEX (6fc - 5fc+1c), 0m136 | ETAM5      | F 00K 110 101 |

### 9.3.14 ETAM9 ECU Adapter (Power)

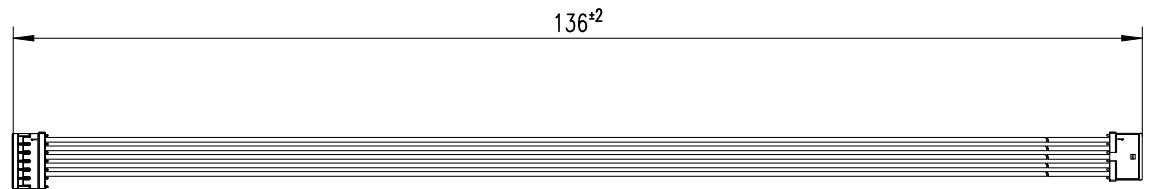

#### 9.3.14.1 Usage

The ETAM9 adapts the M-ETK/F-ETK/ X-ETK power signals (Molex 6 pin connector) to the ECU with an 5 pin Molex Pico Spox connector.

The ETAM9 cable requires on the ECU side an Vertical SMT Header connector [87437-0543] or an Right Angle SMT Header connector [87438-0543].

#### 9.3.14.2 ECU Signals

| Pin | Color  | Signal               | Description                                                                    |
|-----|--------|----------------------|--------------------------------------------------------------------------------|
| 1   | Blue   | VDDPSTBY<br>(Supply) | Permanent power supply of ECU interface                                        |
| 2   | Yellow | VDDSTBY<br>(Supply)  | Permanent power supply of ECU ED RAM                                           |
| 3   | Brown  | GND                  | Power ground                                                                   |
| 4   | Green  | Cal_Wakeup           | Switch to U <sub>Batt</sub> . ECU wake-up signal (for measurement preparation) |
| 5   | Red    | SGUBATT1             | Vehicle battery                                                                |
| 6   | -      | -                    | No Connect                                                                     |


9.3.14.3 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

9.3.14.4 Ordering Information

| Order Name                                                   | Short Name | Order Number  |
|--------------------------------------------------------------|------------|---------------|
| ETAM9 F/XETK-S ECU Adapter, MOLEX - MOLEX (6fc - 5fc), 0m136 | ETAM9      | F 00K 111 043 |


9.3.15 ETAM10 ECU Adapter (Power)

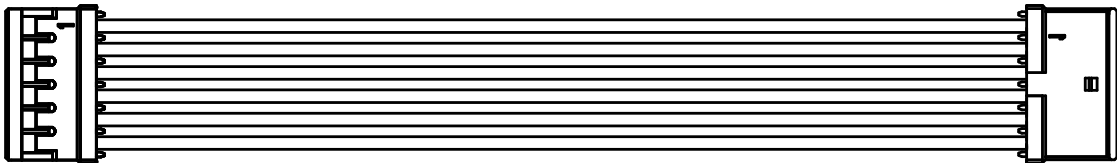

9.3.15.1 Usage

The ETAM10 adapts the ETK power signals (Molex 6 pin connector) to an ECU with an 6 pin Molex Pico Spox connector. The ECU connector is available as Vertical SMT Header [87437-0643] or Right Angle SMT Header [87438-0643].

9.3.15.2 Mechanical Dimensions

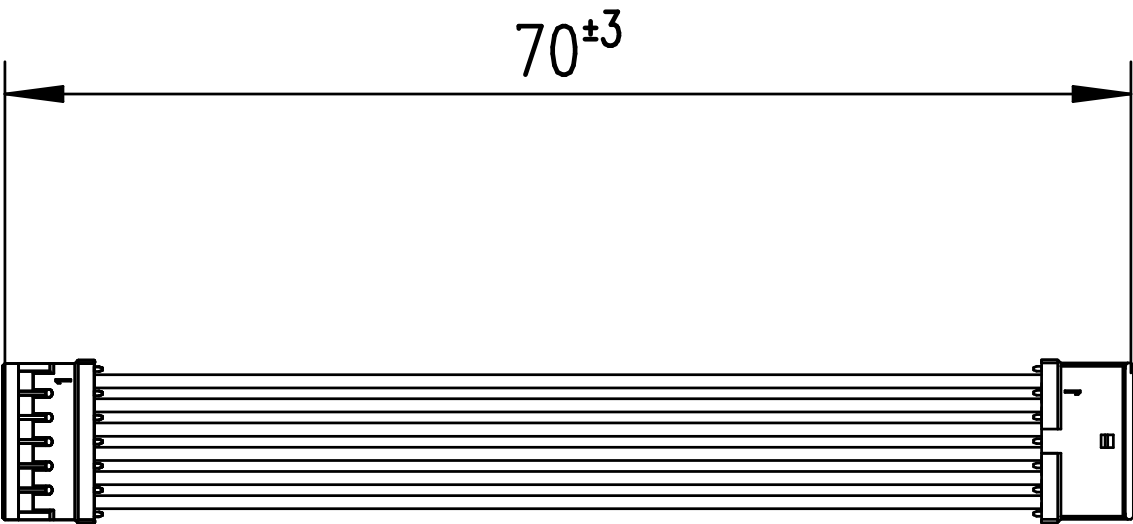

### 9.3.15.3 ECU Signals

| Pin | Color  | Signal     | Description                                                             |
|-----|--------|------------|-------------------------------------------------------------------------|
| 1   | Blue   | VDDPSTBY   | Permanent power supply of ECU interface (Supply)                        |
| 2   | Yellow | VDDSTBY    | Permanent power supply of ECU ED RAM (Supply)                           |
| 3   | Brown  | Ground     | Power ground                                                            |
| 4   | Green  | Cal_Wakeup | Switch to $U_{Batt}$ . ECU wake-up signal (for measurement preparation) |
| 5   | Red    | SGUBATT2   | Vehicle battery                                                         |
| 6   | Red    | SGUBATT1   | Vehicle battery                                                         |


### 9.3.15.4 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

### 9.3.15.5 Ordering Information

| Order Name                                                         | Short Name | Order Number  |
|--------------------------------------------------------------------|------------|---------------|
| ETAM10 F / X-ETK-S ECU Adapter, MOLEX<br>- MOLEX (6fc - 6fc), 0m07 | ETAM10     | F 00K 111 814 |

### 9.3.16 ETAM12 ECU Adapter (Power)

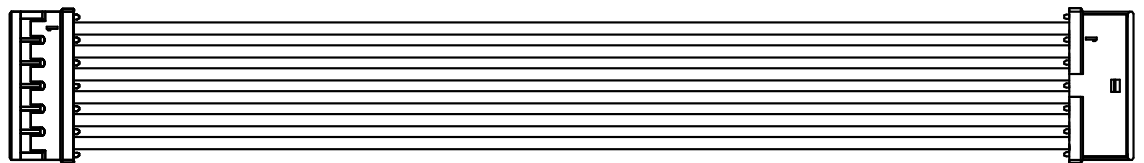


#### 9.3.16.1 Usage

The ETAM12 adapts F-ETK and X-ETK power signals (Molex 6 pin connector) to an ECU with an 6 pin Molex connector.



### 9.3.16.2 Mechanical Dimensions

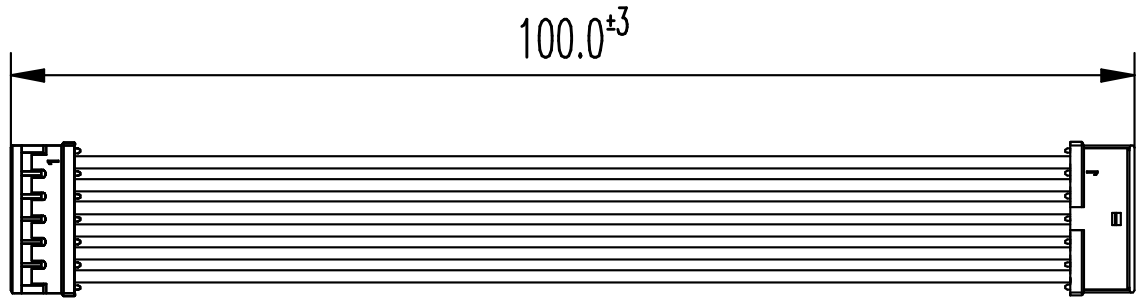

### 9.3.16.3 ECU Signals

The ETAM12 adapts the ETK power signals (Molex 6pin connector) to an ECU with an 6 pin Molex Pico Spox connector. The ECU connector is available as Vertical SMT Header [87437-0643] or Right Angle SMT Header [87438-0643].

| Pin | Color  | Signal     | Description                                                             |
|-----|--------|------------|-------------------------------------------------------------------------|
| 1   | Blue   | VDDPSTBY   | Permanent power supply of ECU interface (Supply)                        |
| 2   | Yellow | VDDSTBY    | Permanent power supply of ECU ED RAM (Supply)                           |
| 3   | Brown  | Ground     | Power ground                                                            |
| 4   | Green  | Cal_Wakeup | Switch to $U_{Batt}$ . ECU wake-up signal (for measurement preparation) |
| 5   | Red    | SGUBATT2   | Vehicle battery                                                         |
| 6   | Red    | SGUBATT1   | Vehicle battery                                                         |


### 9.3.16.4 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

### 9.3.16.5 Ordering Information

| Order Name                                                                                             | Short Name | Order Number  |
|--------------------------------------------------------------------------------------------------------|------------|---------------|
| MOLEX - MOLEX (6fc - 6fc) adapter cable ETAM12 (0,1 m / 0,33 ft) for connecting an F-/X-ETK to the ECU | ETAM12     | F 00K 112 457 |

### 9.3.17 ETV5 Cable

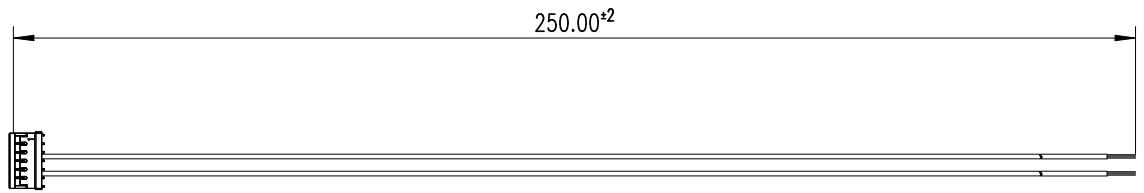

#### 9.3.17.1 Usage

The ETV5 cable is an open wire power supply cable with one battery and GND connection.



#### Note

For better power integrity cut the cable to the shortest possible length.

#### 9.3.17.2 Pin Assignment

| Pin Number | Color | Signal   | Description   |
|------------|-------|----------|---------------|
| 1          |       |          | Not connected |
| 2          |       |          | Not connected |
| 3          | Brown | GND      | Power GND     |
| 4          |       |          | Not connected |
| 5          | Red   | SGUBATT1 | Car Battery   |
| 6          |       |          | Not connected |

#### 9.3.17.3 Temperature Range

| Condition             | Temperature Range |
|-----------------------|-------------------|
| Operating temperature | -40 °C to +110 °C |

#### 9.3.17.4 Ordering

| Product | Length | Order Number  |
|---------|--------|---------------|
| ETV5    | 0.25m  | F 00K 111 701 |

## 10 Contact Information

### Technical Support

For details of your local sales office as well as your local technical support team and product hotlines, take a look at the ETAS website:

[www.etas.com/hotlines](http://www.etas.com/hotlines)



ETAS offers trainings for its products:

[www.etas.com/academy](http://www.etas.com/academy)

### ETAS Headquarters

ETAS GmbH

Borsigstraße 24 Phone: +49 711 3423-0

70469 Stuttgart Fax: +49 711 3423-2106

Germany Internet: [www.etas.com](http://www.etas.com)

## 11 Legal information

### 11.1 Use of Open Source Software

The device contains Open Source Software (OSS). The OSS documentation (OSS Attribution Document) is stored on the device and accessible via the standard web interface of the device. For further information, please see chapter "[Overview of functions](#)" on page 29.

### 11.2 Certification and conformity

#### 11.2.1 Declarable Substances

##### *European Union*

Some products from ETAS GmbH (e.g. modules, boards, cables) use components with materials that are subject to declaration in accordance with the REACH regulation (EC) no.1907/2006. The REACH Declaration is available online at [www.etas.com/reach](http://www.etas.com/reach) and is continuously updated.